



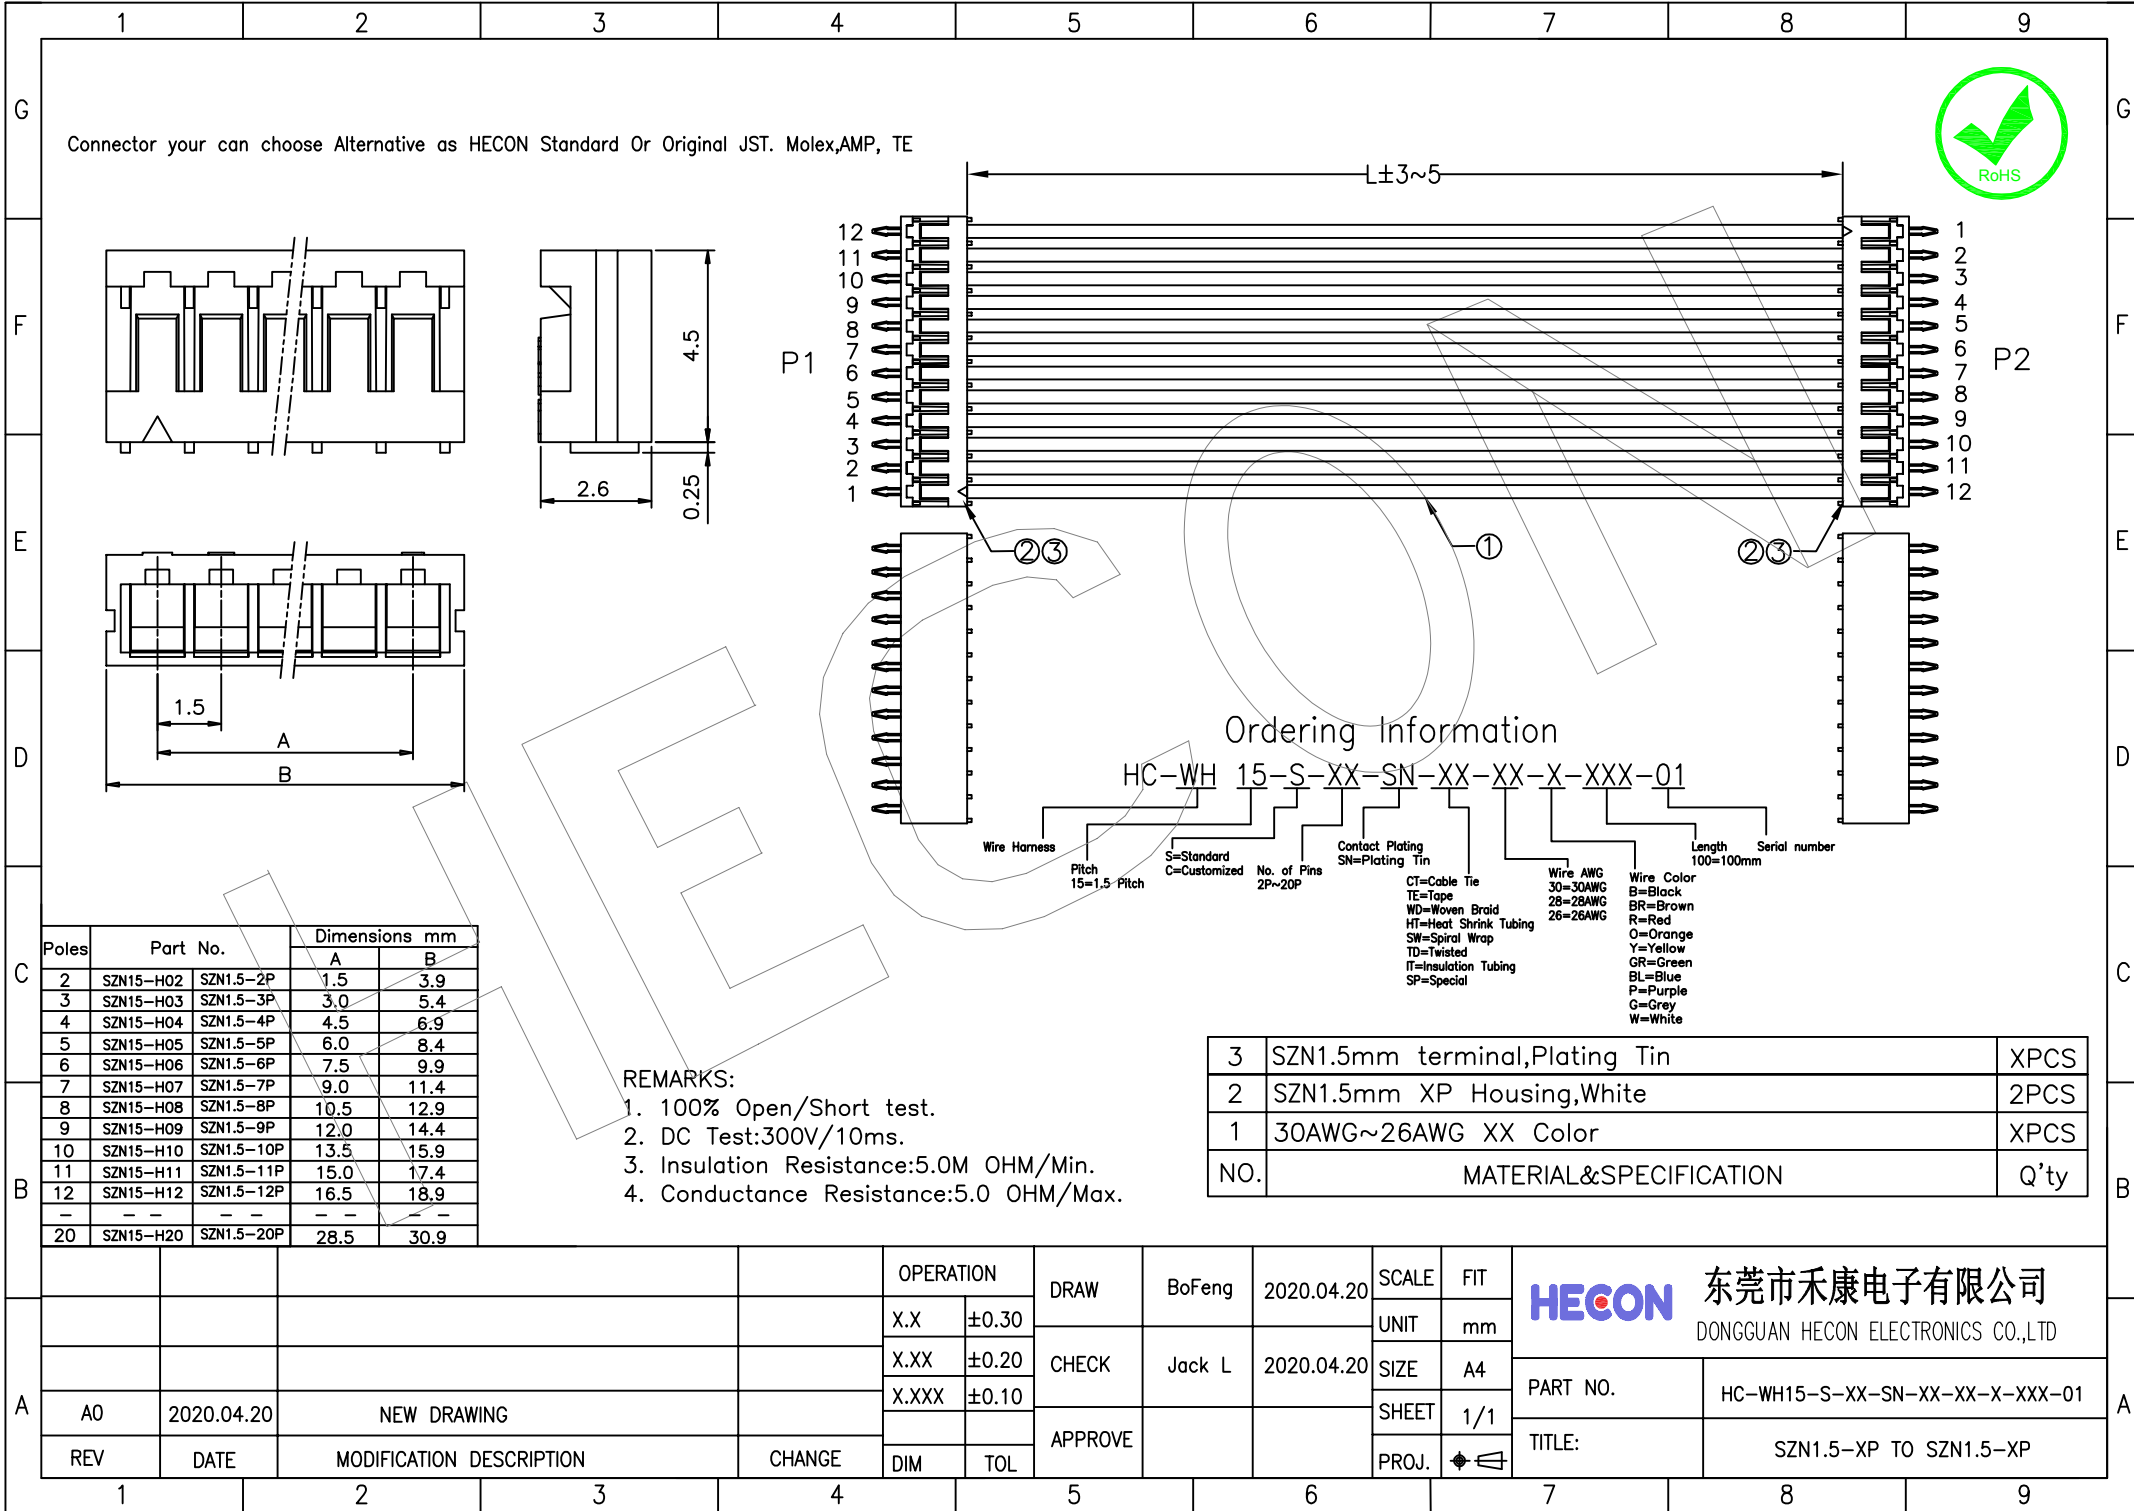

Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

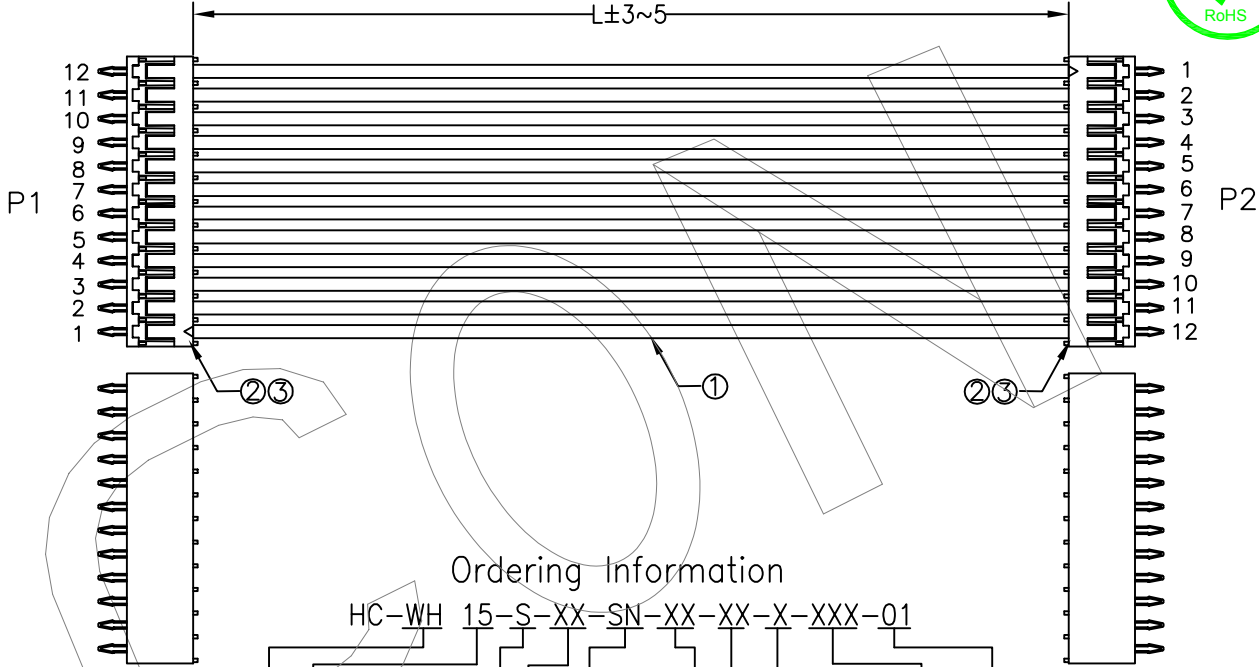

Ordering Information

HC-WH 15-S-XX-SN-XX-XX-X-XXX-01

- Wire Harness
- Pitch 15=1.5 Pitch
- S=Standard C=Customized
- No. of Pins 2P~20P
- Contact Plating SN=Plating Tin
- CT=Cable Tie
- TE=Tape
- WD=Woven Braid
- HT=Heat Shrink Tubing
- SW=Spiral Wrap
- TD=Twisted
- IT=Insulation Tubing
- SP=Special
- Wire AWG 30=30AWG 28=28AWG 26=26AWG
- Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White
- Length 100=100mm
- Serial number

Poles	Part No.	Dimensions mm	
2	SZN15-H02	SZN1.5-2P	1.5 3.9
3	SZN15-H03	SZN1.5-3P	3.0 5.4
4	SZN15-H04	SZN1.5-4P	4.5 6.9
5	SZN15-H05	SZN1.5-5P	6.0 8.4
6	SZN15-H06	SZN1.5-6P	7.5 9.9
7	SZN15-H07	SZN1.5-7P	9.0 11.4
8	SZN15-H08	SZN1.5-8P	10.5 12.9
9	SZN15-H09	SZN1.5-9P	12.0 14.4
10	SZN15-H10	SZN1.5-10P	13.5 15.9
11	SZN15-H11	SZN1.5-11P	15.0 17.4
12	SZN15-H12	SZN1.5-12P	16.5 18.9
20	SZN15-H20	SZN1.5-20P	28.5 30.9

- REMARKS:
- 1. 100% Open/Short test.
 - 2. DC Test:300V/10ms.
 - 3. Insulation Resistance:5.0M OHM/Min.
 - 4. Conductance Resistance:5.0 OHM/Max.

3	SZN1.5mm terminal,Plating Tin	XPCS
2	SZN1.5mm XP Housing,White	2PCS
1	30AWG~26AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30							
				X.XX	±0.20							
				X.XXX	±0.10	CHECK	Jack L	2020.04.20	SIZE	A4	PART NO.	HC-WH15-S-XX-SN-XX-XX-X-XXX-01
						APPROVE			SHEET	1/1	TITLE:	SZN1.5-XP TO SZN1.5-XP
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.			