




Connector your can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE





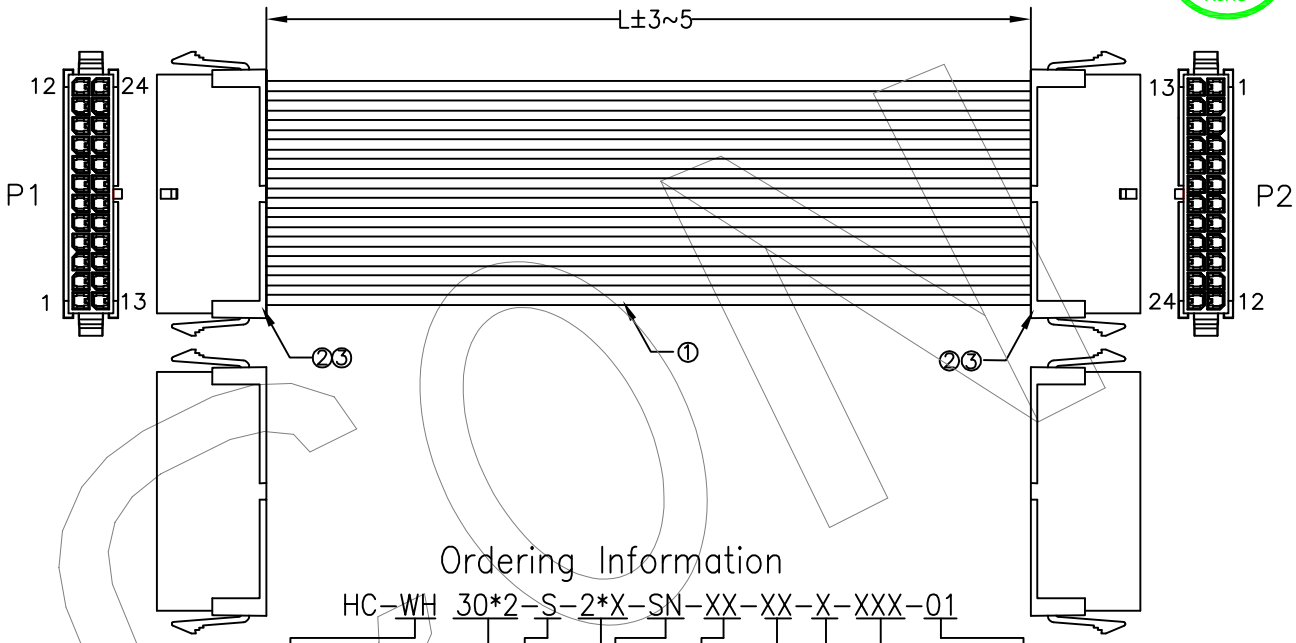





Ordering Information

HC-WH 30*2-S-2*X-SN-XX-XX-X-XXX-01

- Wire Harness
- Pitch 30*2=3.0Pitch*2
- S=Standard C=Customized
- No. of Pins 2*1P~2*12P
- Contact Plating SN=Plating Tin
- CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special
- Wire AWG 30=30AWG 28=28AWG 26=26AWG 24=24AWG 22=22AWG 20=20AWG
- Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White
- Length 100=100mm
- Serial number

Poles	Part No.		Dimensions mm A	Dimensions mm B
2	MX30-H01*2	MX3.0-2*1P	-	5.35
4	MX30-H02*2	MX3.0-2*2P	3.00	8.35
6	MX30-H03*2	MX3.0-2*3P	6.00	11.35
8	MX30-H04*2	MX3.0-2*4P	9.00	14.35
10	MX30-H05*2	MX3.0-2*5P	12.00	17.35
12	MX30-H06*2	MX3.0-2*6P	15.00	20.35
14	MX30-H07*2	MX3.0-2*7P	18.00	23.35
16	MX30-H08*2	MX3.0-2*8P	21.00	26.35
18	MX30-H09*2	MX3.0-2*9P	24.00	29.35
20	MX30-H10*2	MX3.0-2*10P	27.00	32.35
22	MX30-H11*2	MX3.0-2*11P	30.00	35.35
24	MX30-H12*2	MX3.0-2*12P	33.00	38.35

REMARKS:
1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

NO.	MATERIAL&SPECIFICATION	Q'ty
3	MX3.0 Male terminal,Plating Tin	XPCS
2	MX3.0 2*XP Female Housing,Black	2PCS
1	30AWG~20AWG XX Color	XPCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.04.20	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	BoFeng	2020.04.20
X.XX	±0.20	CHECK	Jack L	2020.04.20
X.XXX	±0.10	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.	HC-WH30*2-S-2*X-SN-XX-XX-X-XXX-01
TITLE:	MX3.0-2*XP Female TO MX3.0-2*XP Female