




Connector your can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

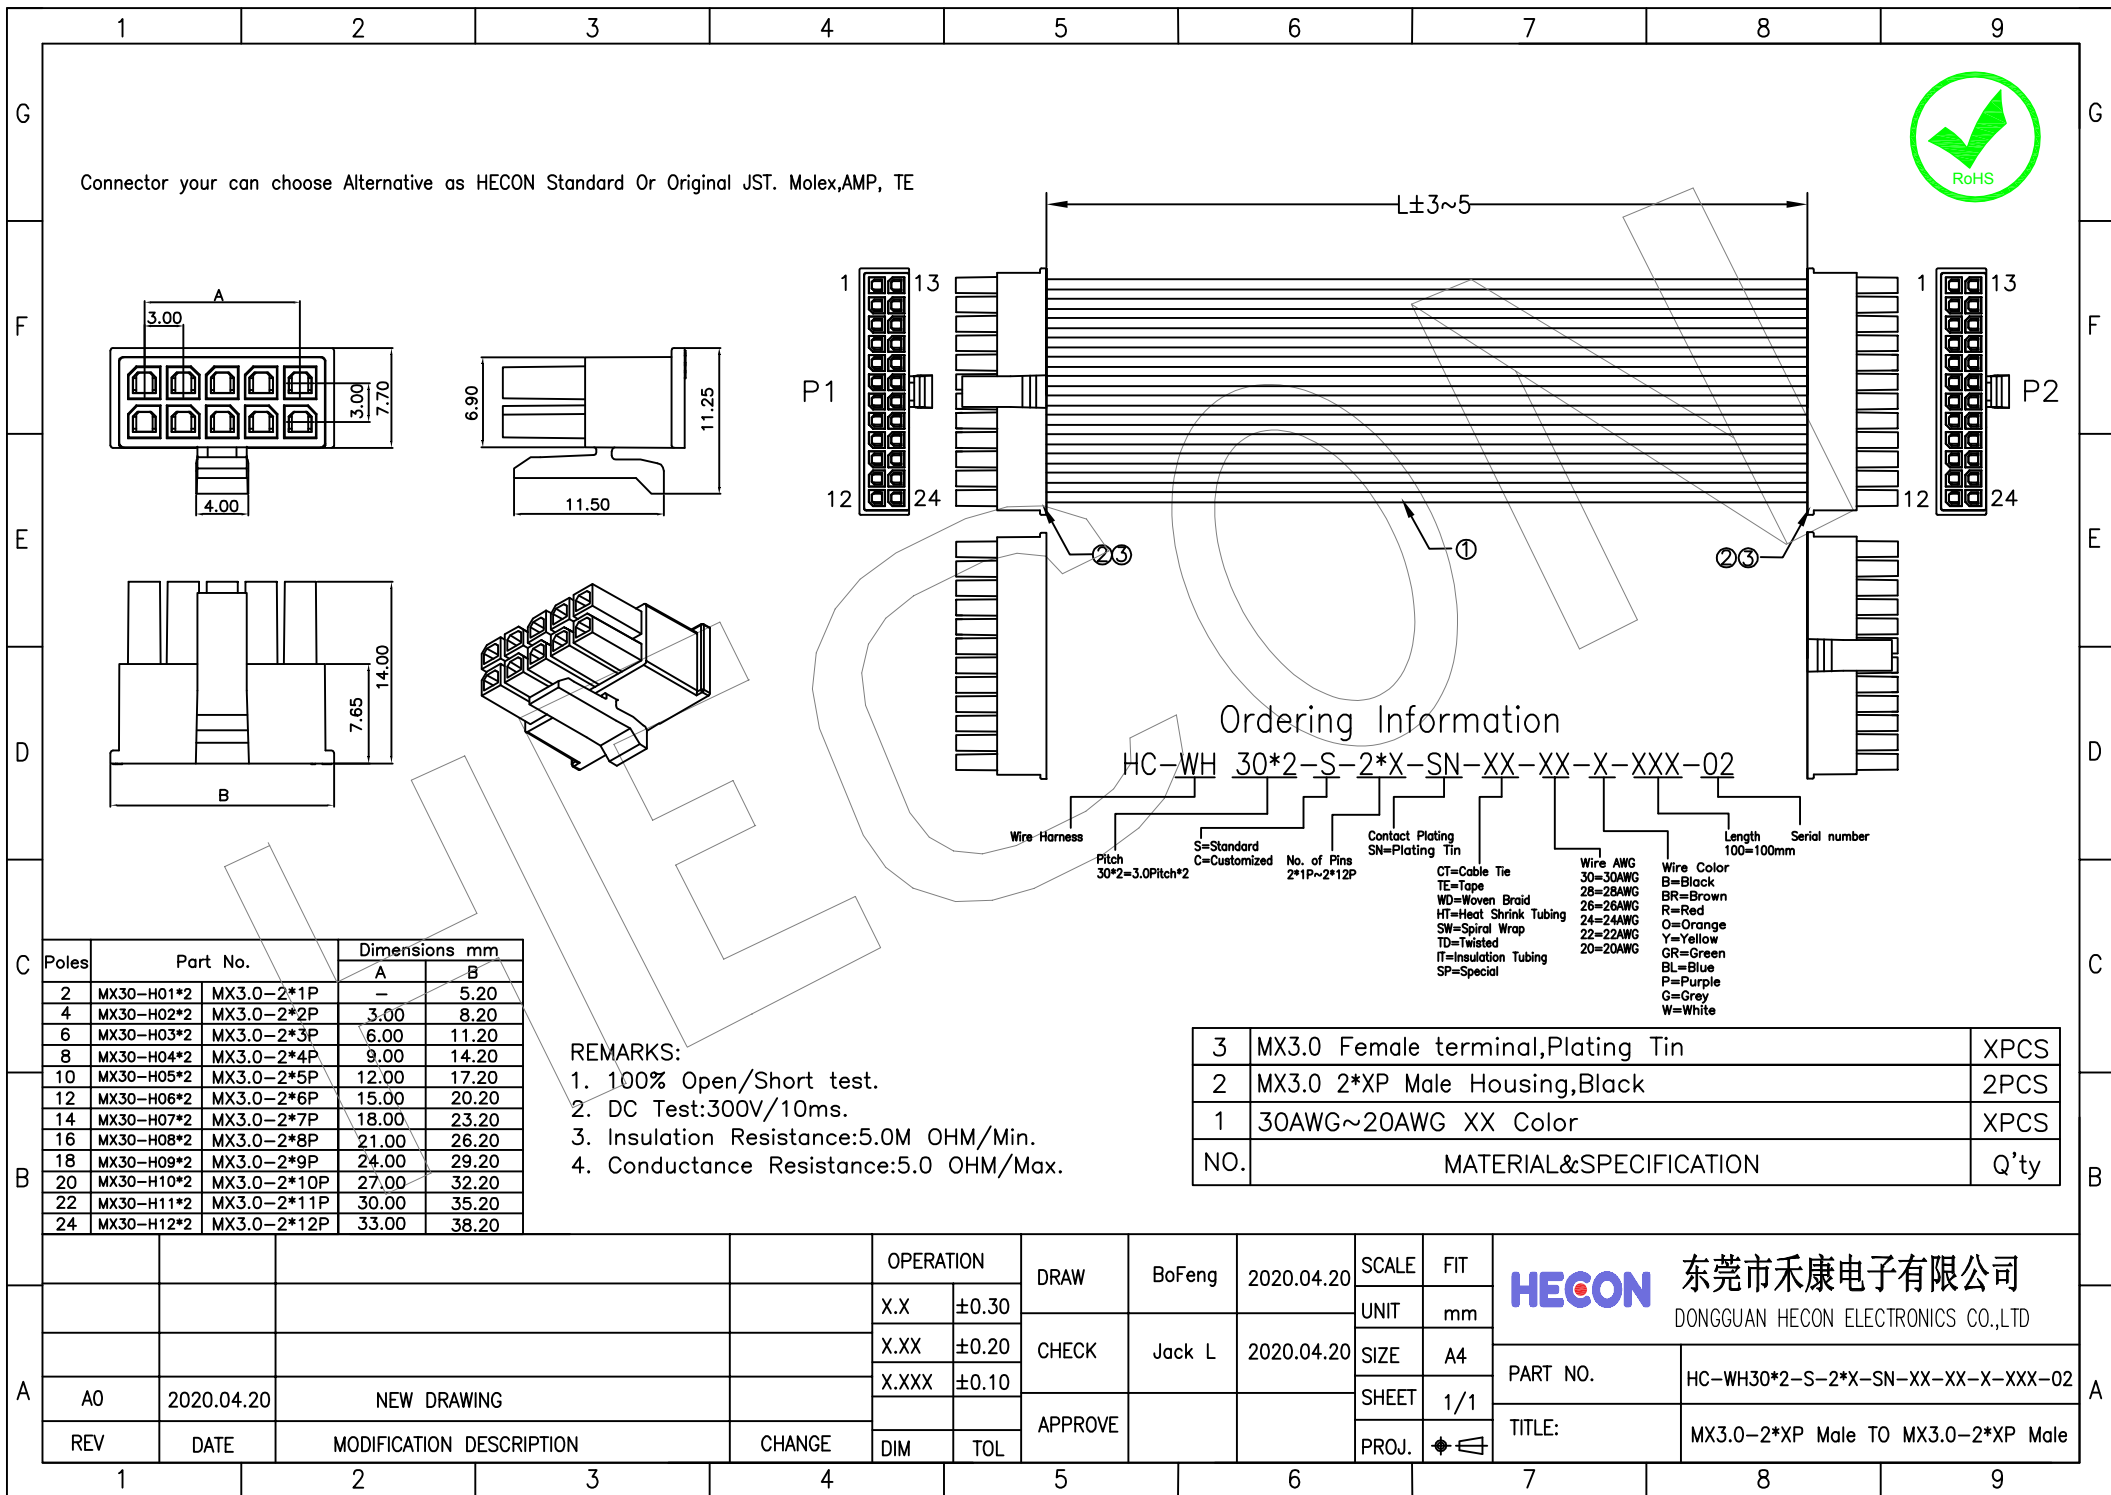

Ordering Information

HC-WH 30*2-S-2*X-SN-XX-XX-X-XXX-02

- Wire Harness
- Pitch 30*2=3.0Pitch*2
- S=Standard C=Customized
- No. of Pins 2*1P~2*12P
- Contact Plating SN=Plating Tin
- CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special
- Wire AWG 30~30AWG 28~28AWG 26~26AWG 24~24AWG 22~22AWG 20~20AWG
- Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White
- Length 100=100mm
- Serial number

- REMARKS:
- 100% Open/Short test.
 - DC Test:300V/10ms.
 - Insulation Resistance:5.0M OHM/Min.
 - Conductance Resistance:5.0 OHM/Max.

3	MX3.0 Female terminal,Plating Tin	XPCS
2	MX3.0 2*XP Male Housing,Black	2PCS
1	30AWG~20AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

Poles	Part No.		Dimensions mm	
			A	B
2	MX30-H01*2	MX3.0-2*1P	-	5.20
4	MX30-H02*2	MX3.0-2*2P	3.00	8.20
6	MX30-H03*2	MX3.0-2*3P	6.00	11.20
8	MX30-H04*2	MX3.0-2*4P	9.00	14.20
10	MX30-H05*2	MX3.0-2*5P	12.00	17.20
12	MX30-H06*2	MX3.0-2*6P	15.00	20.20
14	MX30-H07*2	MX3.0-2*7P	18.00	23.20
16	MX30-H08*2	MX3.0-2*8P	21.00	26.20
18	MX30-H09*2	MX3.0-2*9P	24.00	29.20
20	MX30-H10*2	MX3.0-2*10P	27.00	32.20
22	MX30-H11*2	MX3.0-2*11P	30.00	35.20
24	MX30-H12*2	MX3.0-2*12P	33.00	38.20

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4	PART NO.	HC-WH30*2-S-2*X-SN-XX-XX-X-XXX-02
				X.XXX	±0.10				SHEET	1/1		
A0	2020.04.20	NEW DRAWING				APPROVE			PROJ.		TITLE:	MX3.0-2*XP Male TO MX3.0-2*XP Male
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							