




Connector your can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE









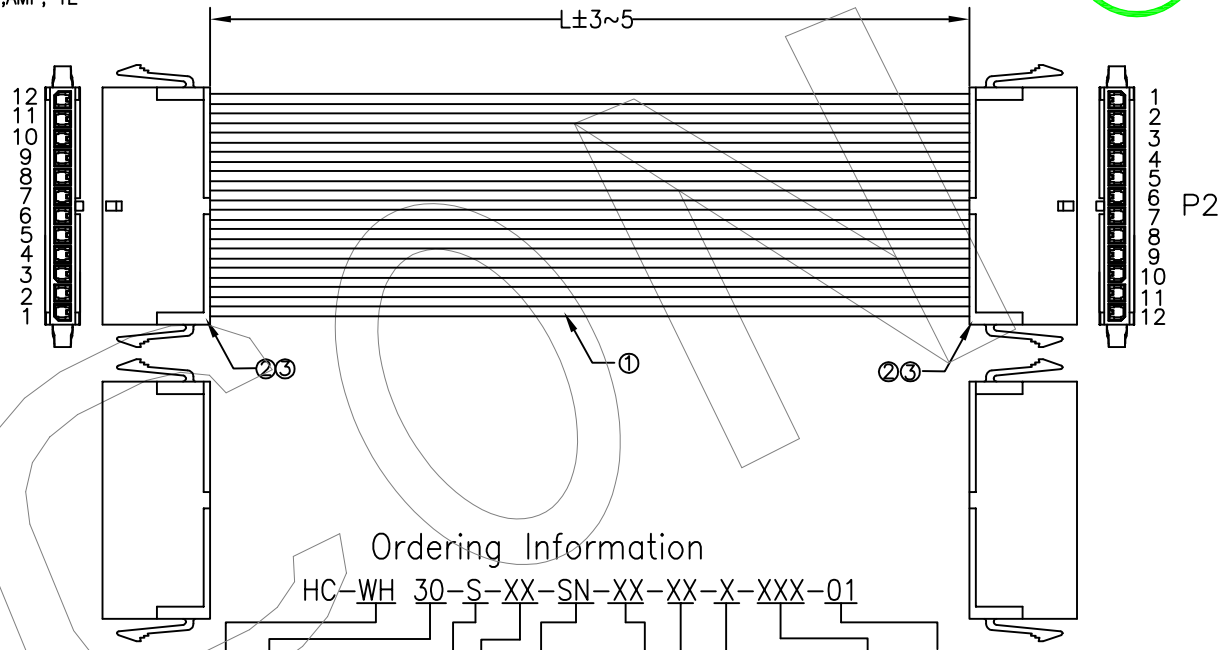

Ordering Information

HC-WH 30-S-XX-SN-XX-XX-X-XXX-01

- Wire Harness
- Pitch: 30=3.0 Pitch
- S=Standard; C=Customized
- No. of Pins: 2P~12P
- Contact Plating: SN=Plating Tin
- CT=Cable Tie; TE=Tape; WD=Woven Braid; HT=Heat Shrink Tubing; SW=Spiral Wrap; TD=Twisted; IT=Insulation Tubing; SP=Special
- Wire AWG: 30=30AWG; 28=28AWG; 26=26AWG; 24=24AWG; 22=22AWG; 20=20AWG
- Wire Color: B=Black; BR=Brown; R=Red; O=Orange; Y=Yellow; GR=Green; BL=Blue; P=Purple; G=Grey; W=White
- Length: 100=100mm
- Serial number

Poles	Part No.		Dimensions mm A	B
2	MX30-H02	MX3.0-2P	3.00	6.85
3	MX30-H03	MX3.0-3P	6.00	9.85
4	MX30-H04	MX3.0-4P	9.00	12.85
5	MX30-H05	MX3.0-5P	12.00	15.85
6	MX30-H06	MX3.0-6P	15.00	18.85
7	MX30-H07	MX3.0-7P	18.00	21.85
8	MX30-H08	MX3.0-8P	21.00	24.85
9	MX30-H09	MX3.0-9P	24.00	27.85
10	MX30-H10	MX3.0-10P	27.00	30.85
11	MX30-H11	MX3.0-11P	30.00	33.85
12	MX30-H12	MX3.0-12P	33.00	36.85

REMARKS:
1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

NO.	MATERIAL&SPECIFICATION	Q'ty
3	MX3.0 Male terminal,Plating Tin	XPCS
2	MX3.0 XP Female Housing,Black	2PCS
1	30AWG~20AWG XX Color	XPCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.04.20	NEW DRAWING	

OPERATION		DRAW	BoFeng	2020.04.20
X.X	±0.30			
X.XX	±0.20	CHECK	Jack L	2020.04.20
X.XXX	±0.10			
		APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.	HC-WH30-S-XX-SN-XX-XX-X-XXX-01
TITLE:	MX3.0-XP Female TO MX3.0-XP Female