

RoHS

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze





Contact Plating:Tin Plated

Applicable Wire:26AWG and 28AWG

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

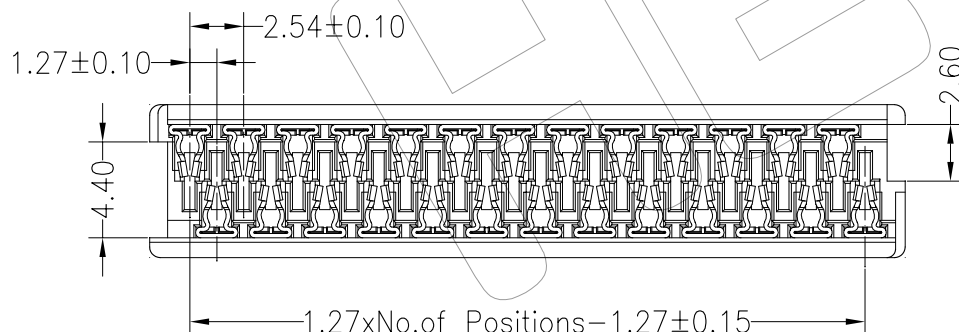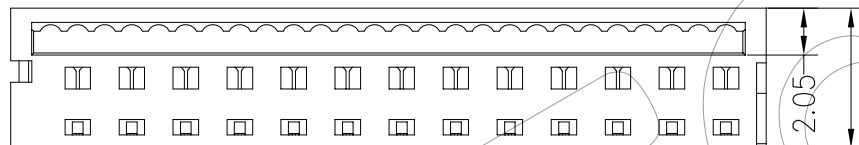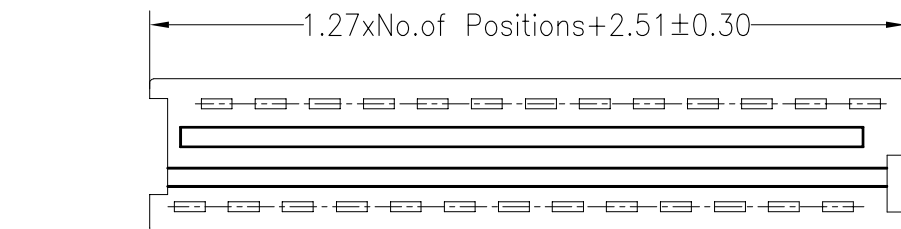

Ordering Information

HC-PX XX F I XX A N X 01

No.of
Pins
06~26P

Contact Plating
SN:Tin
SM:Matte-Tin
Ni:Ni

Packing
T=Tube
A=Tray

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PXXXXFIXXANX01

TITLE:

1.27mm Picoflex IDC-Type Connector

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9