
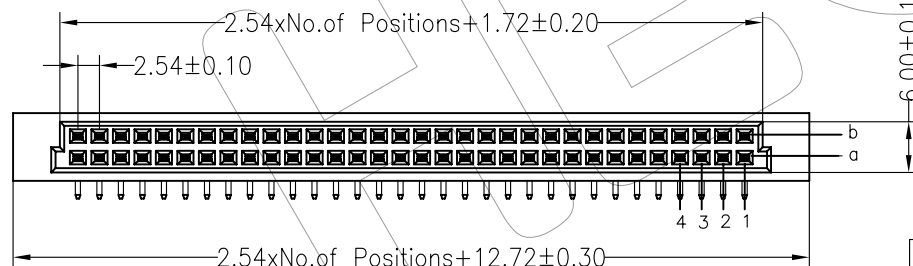
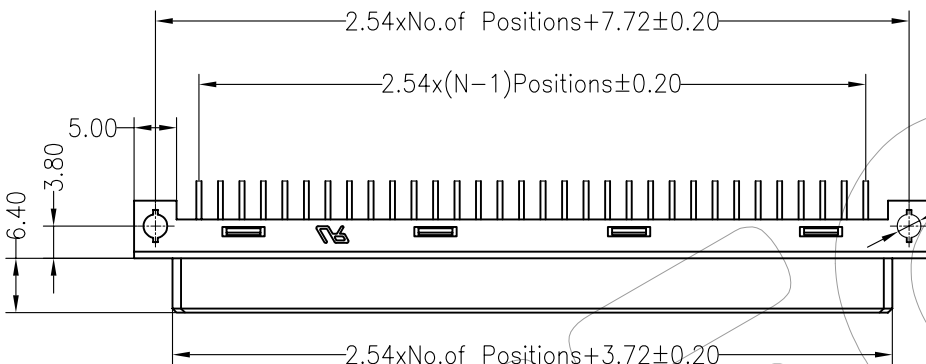


RoHS

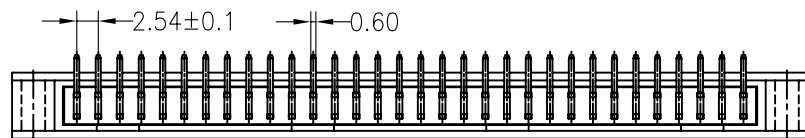

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

SPECIFICATIONS
Rated Current:2.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Ordering Information

HC-4DIN41612 2 XX A E R XX BNA1

No. of Pins
16~64P
Contact Type
M=male
F=Female
Contact Plating
G0:Gold Flash/Tin
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

OPERATION

X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
Angle $\pm 3^\circ$
DIM TOL

DRAW

Ayang

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-4DIN416122XXAFRXXBNA1

TITLE:

DIN 41612 Right Angle 2xNpin Female

1 2 3 4 5 6 7 8 9