


RoHS

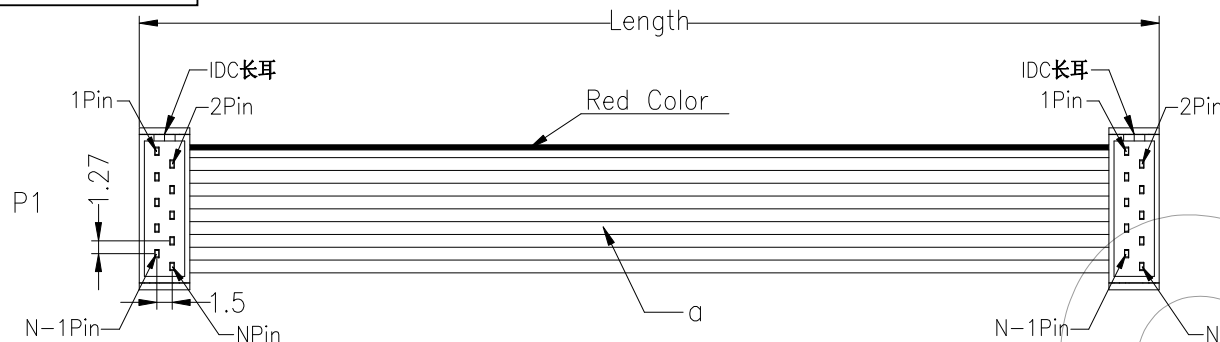

Connector Specifications
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Wire Specifications
Insulator Material:PVC
Conductor:7/0.10mm(Tin Plated Copper)

Testing
Contact Resistance:3Ω Max.
Insulation Resistance:10MΩ Min.
Withstand Voltage:DC300V, 5second

Pin Contact Wire Color	
P1	P2
1 Red	1
2 Grey	2
3 Grey	3
...	...
N-1P Grey	N-1P
NP Grey	NP

Length	Tolerance
≤100	±5
100~500	±10
>500	±15
>1500	±20

注: N为PIN数, L为线的净长。

Item(项目)	L	N
Dimension (尺寸)	20mm	06P

b	1.27 NP Micro Match IDC-Type Red PBT Sn	2	PCS
a	UL2651 28awg PH1.27 NPin Wires Red Marking Grey Side	XXX	mm
NO.	Specification	Q'TY	UNIT

Ordering Information

HC-FMA-XX SN A R XXX 0X

No. of Pins 4P~26P Contact Plating SN: Tin Insulation Color R=Red Length L=XXXmm Stream code 01~99

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO. HC-FMA-XXSNARXXX0XX
TITLE: Micro Match Flat Cable