
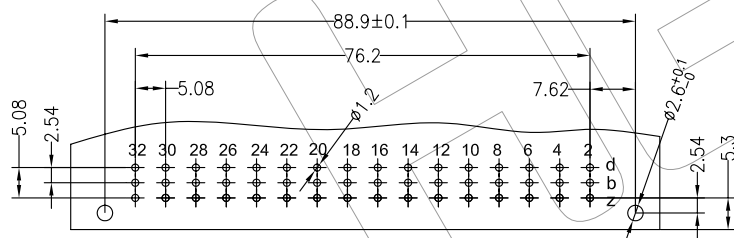
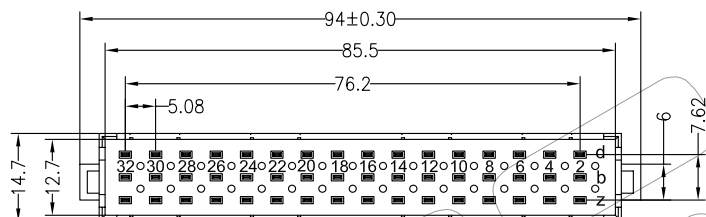



RoHS

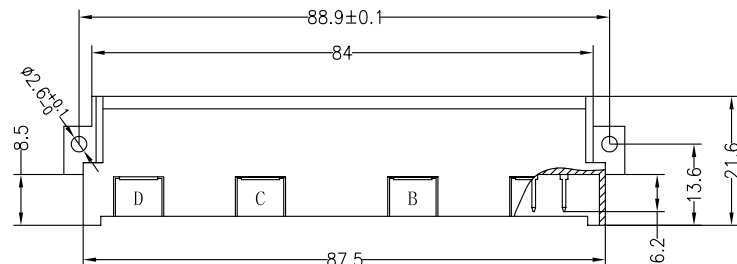

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

SPECIFICATIONS

Current rating: 5.6 Amps .
Contact resistance: 20 mohms initial
Insulation resistance: 100000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Operating temperature: -55°C TO +125°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Ordering Information

HC-2DIN416123 48 A M R XX BNA1

No.of Pins
48PIN

Contact Type
M=male

Contact Plating
G0:Gold Flash/Tin
S0:Gold
S2:2U" Gold/Tin
S3:3U" Gold/Tin
S4:5U" Gold/Tin
S5:10U" Gold/Tin
S6:15U" Gold/Tin
S7:30U" Gold/Tin

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-2DIN41612348AMRXXBNA1

TITLE:

5.08mm DIN41612 large current right Angle Male

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9