
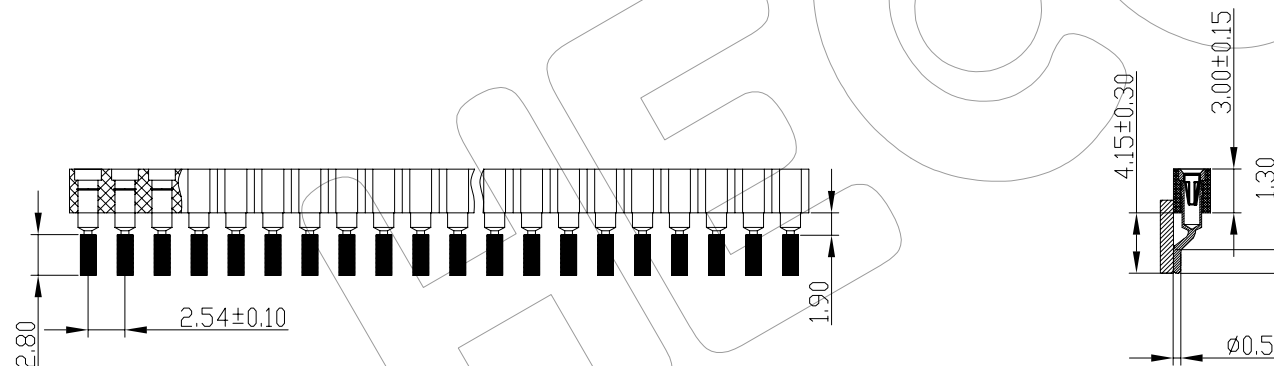


RoHS

Technical Specs:

Insulator: Black glass filled polyester PPS
Flammability: UL 94V-0
Sleeve: Brass
Contact clip(4/6 finger): Beryllium copper(C17200)
Accepted pin: Ø0.40 to 0.56mm
Forces: (polished steel gauge Ø0.43mm)
--Insertion 2 N typ
--Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10mΩ
Dielectric resistance: 1000MΩ Min

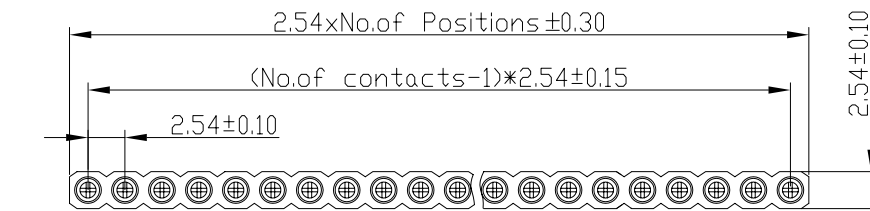

Ordering Information

HC-MF420 30 1 XX Z XX 074 X 1

Insulator Type Code	No.of Pins	Contact Plating	Pin Length	Packing
1: Single row	1x40Pins	SN: Tin	074=7.4mm	0=Pe bag
2: Double row	2x40Pins	G0: Gold Flash		T=Tube
		G2: 2U"Gold		R=Reel
		G3: 3U"Gold		
		G4: 5U"Gold		
		G5: 10U"Gold		
		S0: Gold Flash/Tin		
		Standard: G0		

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MF420301XXZXX074X1

TITLE:

2.54x3.0mm Machine Female Header Right
Angle SMT L=7.40