

RoHS

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Ordering Information


HC-DIP30 XX X XX B 0 1(2)

No.of
Pins
10~50P


Contact Material
B=Brass
P=Phosphor
Bronze

Contact Plating
SN:Tin
G0:Gold Flash
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:30U"Gold
S0:Gold Flash/Tin


Color Type
B=Black
G=Grey





3.0±0.15

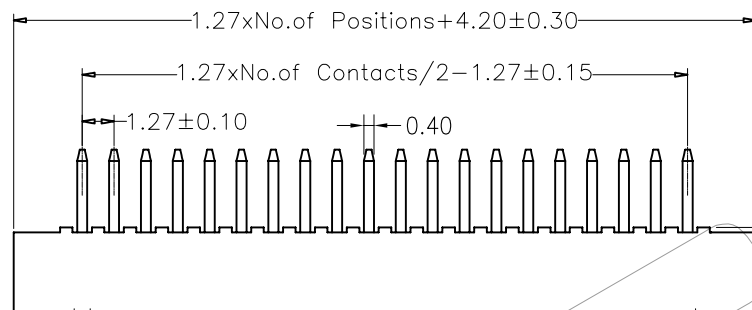

3.0±0.15



A±0.15

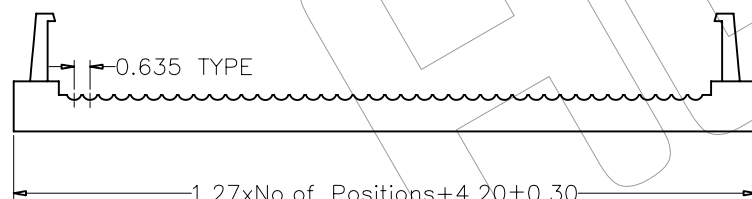

PART NO.	Dimension "A"
HC-DIP30XXXXXB01	2.00
HC-DIP30XXXXXB02	3.40

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

Ayang

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-DIP30XXXXXB01(2)

TITLE:

1.27mm DIP NPin D-Type Matte-Tin
Four Row Foot

A0

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE