
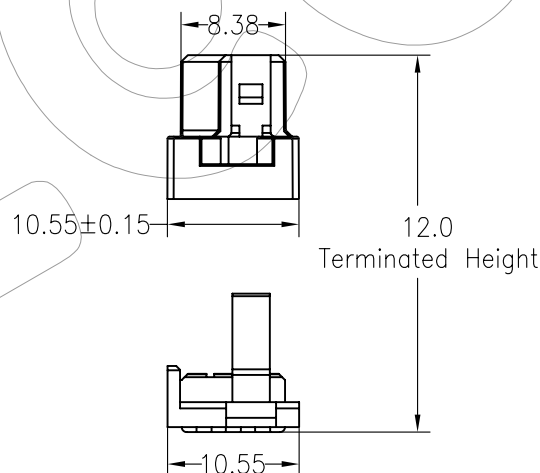
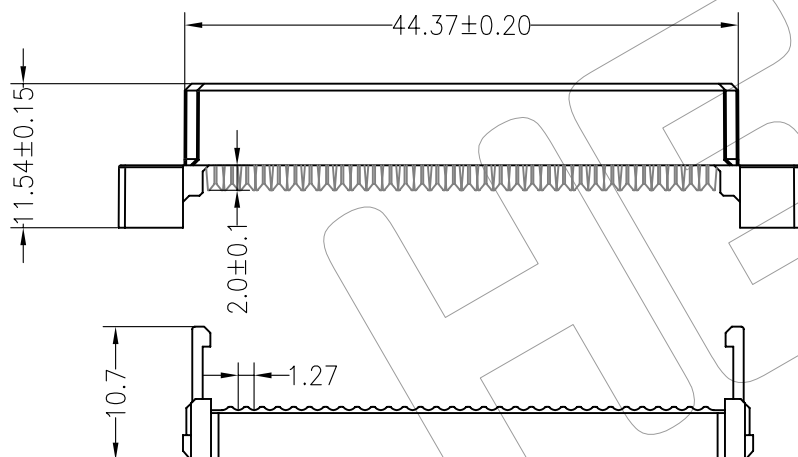



RoHS

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

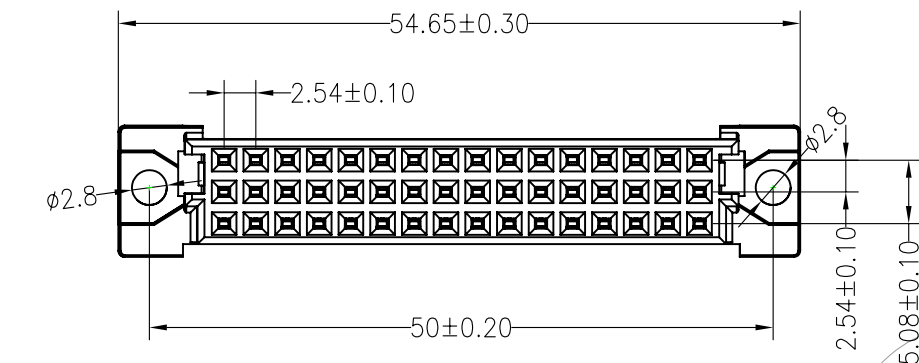

Ordering Information

HC-4DIN416123 48 A F I XX P W A1

No. of Pins
48=48Pin

Contact Type
A=a+b+c
B=a+b
C=a+c

Contact Plating
Ni: Ni
SO: Gold Flash/ Ni

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-4DIN41612348AFIXXPWA1

TITLE:

DIN41612 348 Female IDC-Type