
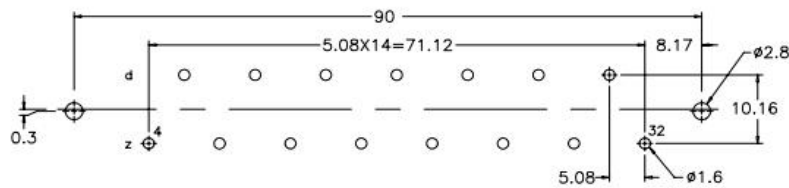

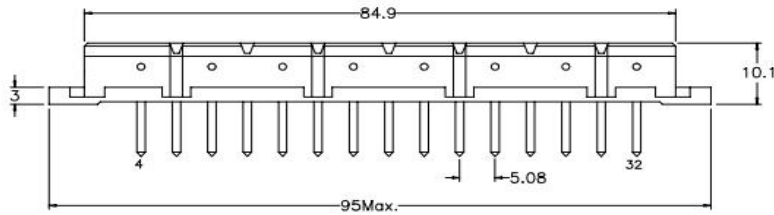


SPECIFICATIONS:

Rated Current	15.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	1000V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Phosphor Bronze
Contact Plating	Au Over Ni
Insulator Material	PBT -UL94V-0
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds

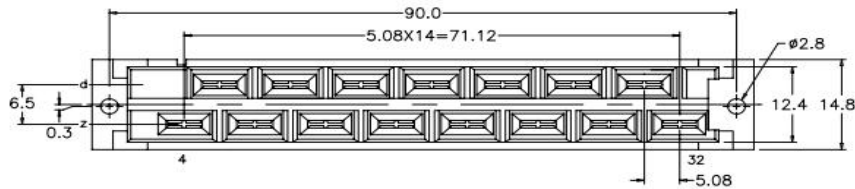

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Ordering Information

HC Series	No.of Pin Per Row	Inner Code Material	Contact Type	Solder Type	Plating Code	Color Code	Packing Code	End code
HC-4DIN41612	16P-64P	A	F=Female	S=Straight	G0=Gold Flash	BN	A=Tray	01
5.08mm					SN=Tin			
DIN41612					S0=Gold Flash/Tin			
					S1=2U Gold/Tin			
					S2=5U Gold/Tin			
					S3=10U Gold/Tin			
					S4=15U Gold/Tin			
					S5=30U Gold/Tin			