
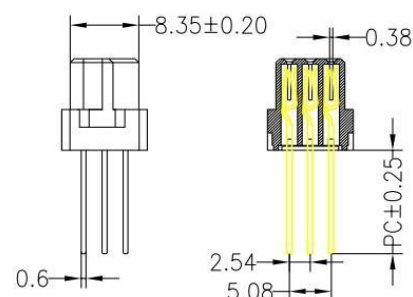
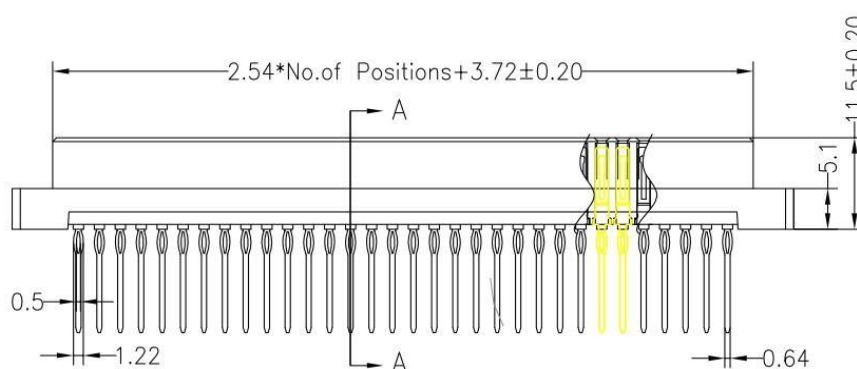
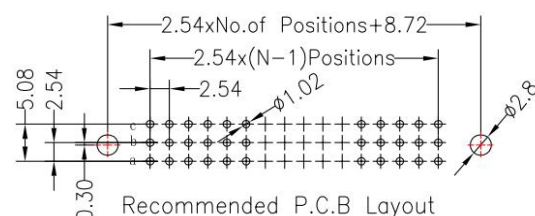
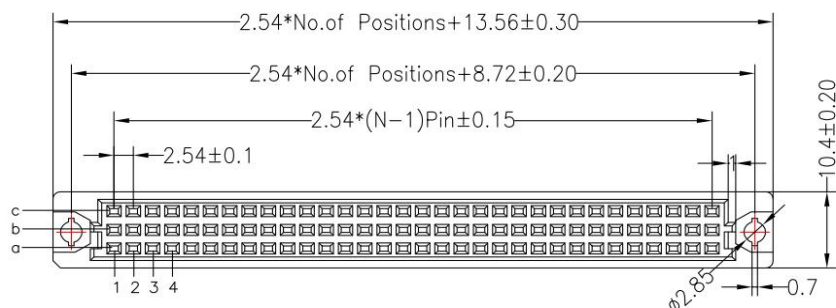


SPECIFICATIONS:

Rated Current	2.0AMP
Contact Resistance	30mΩ Max
Withstand Voltage	1000V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au Over Ni
Insulator Material	PBT -UL94V-0
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds

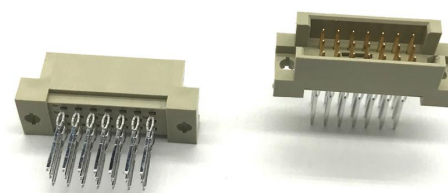

Dimension antitheses list	
ITEM	PC
Standard	1=4.80 3=15.0
	2=13.0 4=17.0
Alternate	

Ordering Information

HC Series	No.of Pin Per Row	Inner Code Material	Contact Type	Type	Plating Code	Color Code	Packing Code	End code
HC-4DIN41612 2.54mm DIN41612	21P-120P	A	F=Female	P=Press Fit	G0=Gold Flash	BN	A=Tray	01
					SN=Tin			
					S0=Gold Flash/Tin			
					S1=2U Gold/Tin			
					S2=5U Gold/Tin			
					S3=10U Gold/Tin			
					S4=15U Gold/Tin			
					S5=30U Gold/Tin			