






RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:1 Ω Max
Withstand Voltage:500V AC/Min
Insulation Resistance:100M Ω Min
Voltage Rating:250V AD,DC
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180 $^{\circ}$ C for 30-60 seconds
(200 $^{\circ}$ C for 10 seconds)

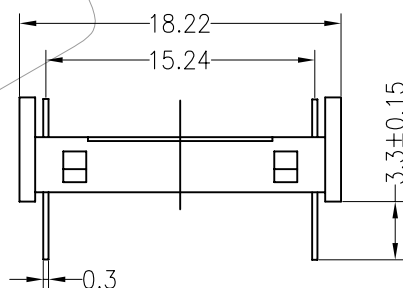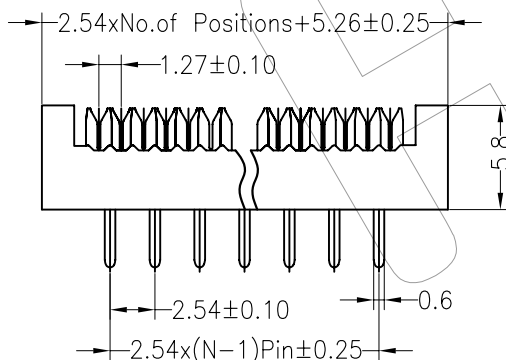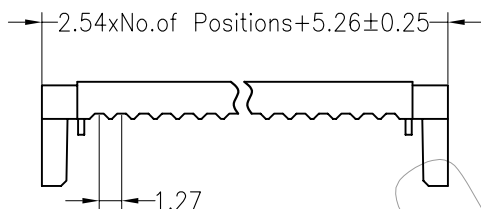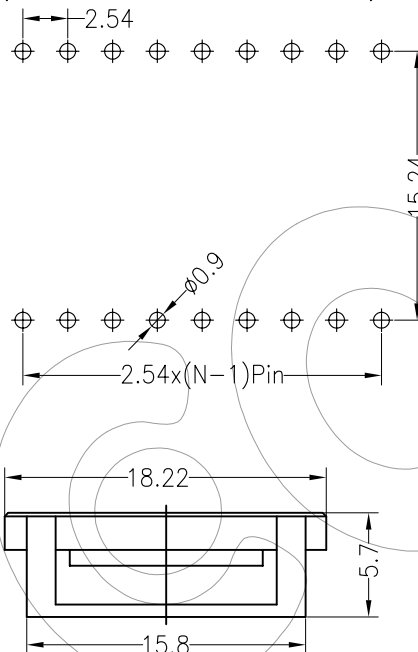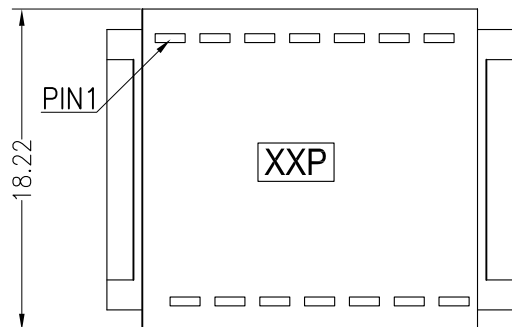

Ordering Information

HC-DIP60 - XX B XX X 02

No.of
Pins
08~40P

Connector Type
B=Brass

Contact Plating
SN:Tin
G0:Gold Flash
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:30U"Gold
S0:Gold Flash/Tin

Color Type
B=Black
G=Grey

OPERATION

X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
Angle $\pm 3^{\circ}$
DIM TOL

DRAW

Ayang

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-DIP60XXBXXX02

TITLE:

2.54x15.24mm Npin DIP Plug

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

NEW DRAWING