
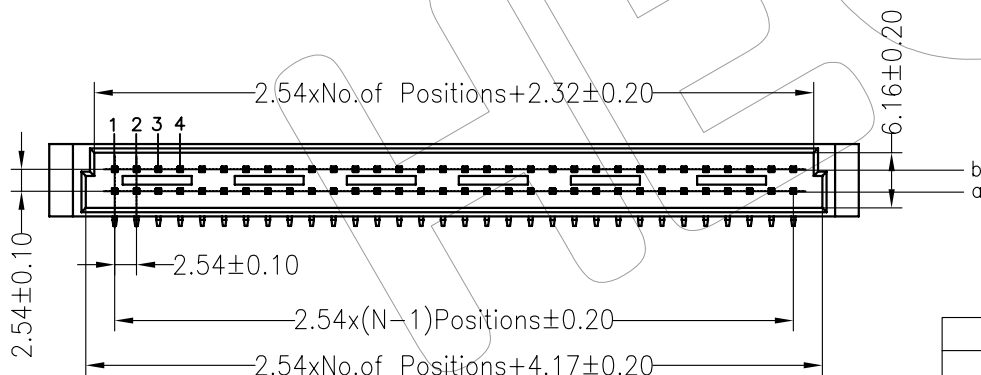
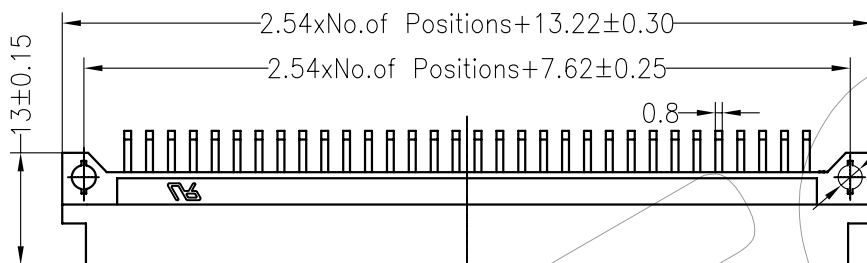


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c
Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 5 seconds)

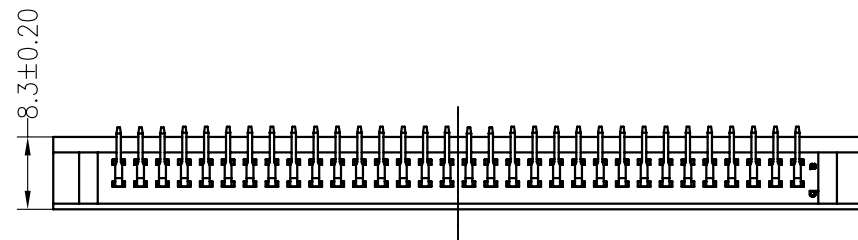

Dimension antitheses list

ITEM	A	
Standard	2.90	3.20
Alternate		

Ordering Information

HC-4DIN416122 XX A M R XX BNA1

No.of Pins
16,20,32,
48,64P

Contact Type
M=male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

OPERATION

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW

Ayang

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-4DIN416122XXAMRXXBNA1

TITLE:

DIN 41612 Right Angle 2xNpin Male

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0		NEW DRAWING	