


ROHS

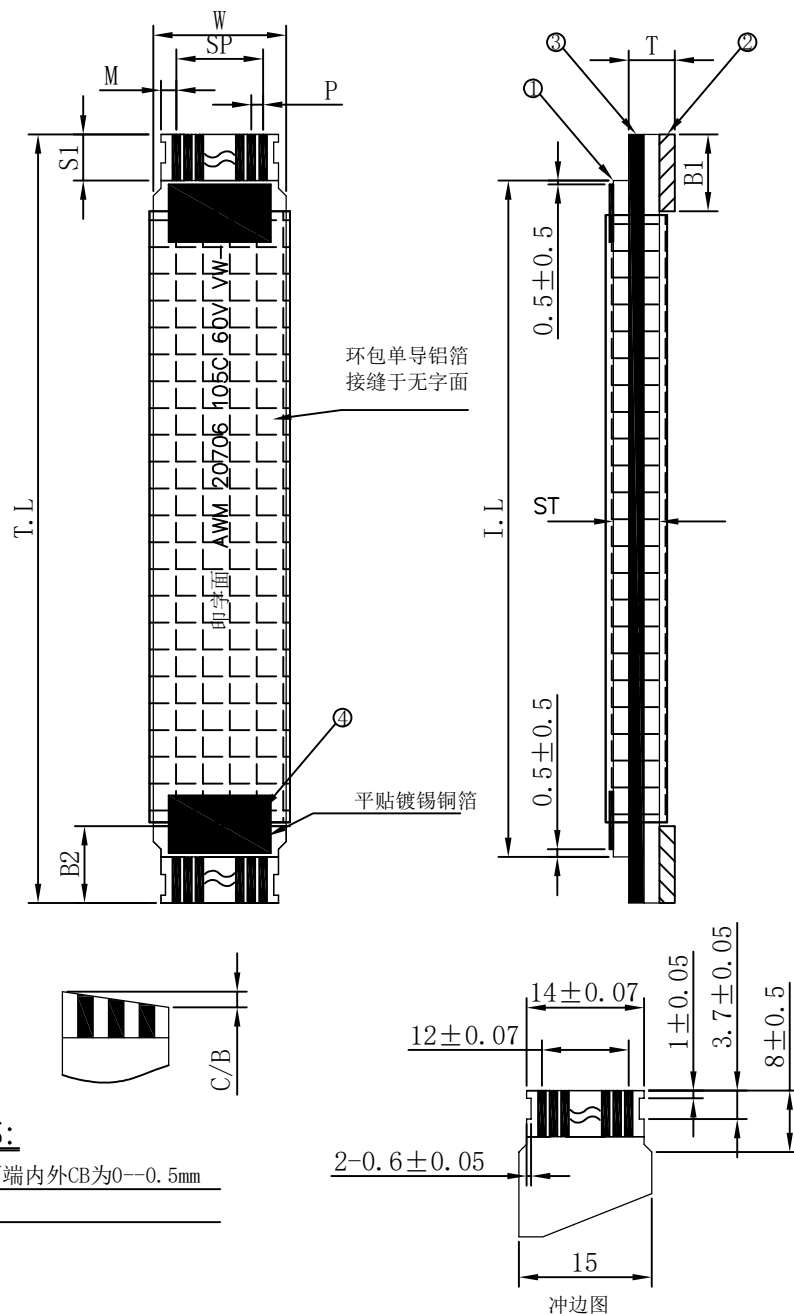

A

	STRUCTURE			
NO	ITEM NAME	SPECIFICATION		REMARK
1	INSULATION (绝缘层)	印字20706 43um 客供		105C,60V
		空白43um		
	印字	AWM 20706 105C 60V VW-1		
2	P/TAPE (补强板)	225um		蓝色
3	CONDUCTOR (红铜线)	THICKNESS	0.035	±0.005
		WIDTH	0.3	±0.03
	CONDUCTOR (导体镀层)	PLATED	Ni(40u")	MIN
		PLATED	Au(3u")	MIN
4	镀锡铜箔	W12.5*L15*T0.12		2PCS
5	内导铝箔	W35*L50*T0.07		银色

DIMENSION			
PITCH (间距)	P	0.5	±0.05
SPAN(全间距)	SP	12.0	±0.07
WIDTH(总宽度)	W	15.0	±0.08
MARGIN(边距)	M	1.0	±0.08
	M1		
INSERT THICKNESS (插入厚度)	T	0.30	±0.03
SURFACE THICKNESS (线身厚度)	ST	0.12	±0.03
PROTECTOR LENGTH (补强板长度)	B1	10.0	±2.0
	B2	10.0	±2.0
STRIP LENGTH (金手指长度)	S1	2.2	±0.5
	S2	2.2	±0.5
INSULATION LENGTH (绝缘层长度)	I.L	65.6	±2.0
TOTAL LENGTH (产品总长度)	T.L	70.0	±2.0
NO of PIN(导体数量)	25P		

HECON P/N
HC-FFC-05-25P-XXX-A-X

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO., LTD

TITLE
0.5*25P*70 2.2/2.2/10/10 A

APPROVED

CHECKED

DRAWN

Bo Feng

UNIT
mm

SIZE
A4

REV

A

SHEET

1/1