
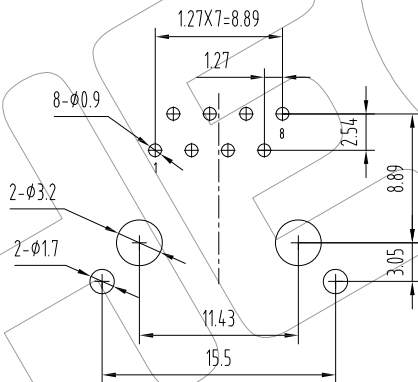
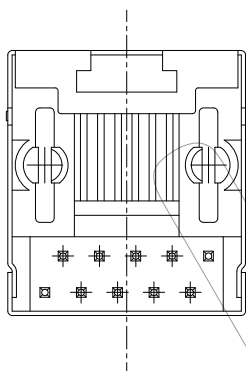
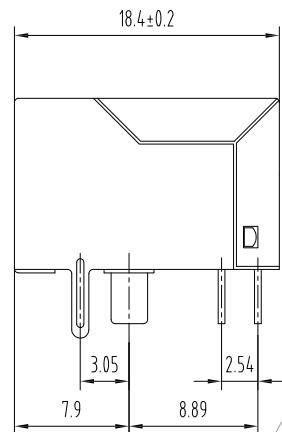


RoHS

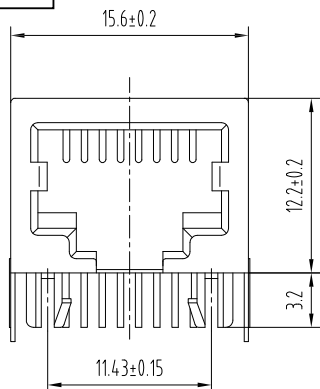

PC Board Layout
Component Side Shown

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
2. CONTACT MATERIAL:PHOSPHOR BRONZE $\phi 0.46$
3. PLATING:GOLD PLATING OVER NICKEL, PLATED
NICKEL 30-50U". SN 100-120U. GOLD PLATED
ON CONTACT AREA FU/3U/6U/15U/30U"
4. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE:-40° C TO +85° C
2. OPERATION: 0° C TO 75° C

Part Number:
HC-HR5623S-11108 X 1 B-C-1 R

Electroplating:

0=FU金 1=1U金 2=2.5U金
3=3U金 4=6U金 5=15U金
6=30U金 7=50U金

Material:

1=PBT 2=PA46
3=PA66 4=PA9T 5=LCP

Colour:

B=黑色 G=绿色 R=红色 Y=黄色
V=紫色 W=白色 H=灰色 L=蓝色

environmental protection:
R=Rohs Free
H=Halogen Free

Packing:

1=Tray
2=Tape Reel

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-HR5623S-11108 X 1 B-C-1 R

TITLE:

Shielded RJ45 Modular Jack,
Through Hole Type, Ports

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9