


RoHS



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

特性注解:

1. 电气特性:

额定电流: 3 A 最大

工作电压: 20V Max.

介质承受电压: AC 100V /1分钟

绝缘阻抗: 100 MΩ 最小.

接触阻抗: 40 mΩ 最大.

2. 环境:

工作温度: -40℃~+85℃.


3. 机械特性:

插入力: 5~20Nf.

拔出力: 6~20Nf.

耐久寿命: 5000 Cycles.

4. 盐雾: 24H

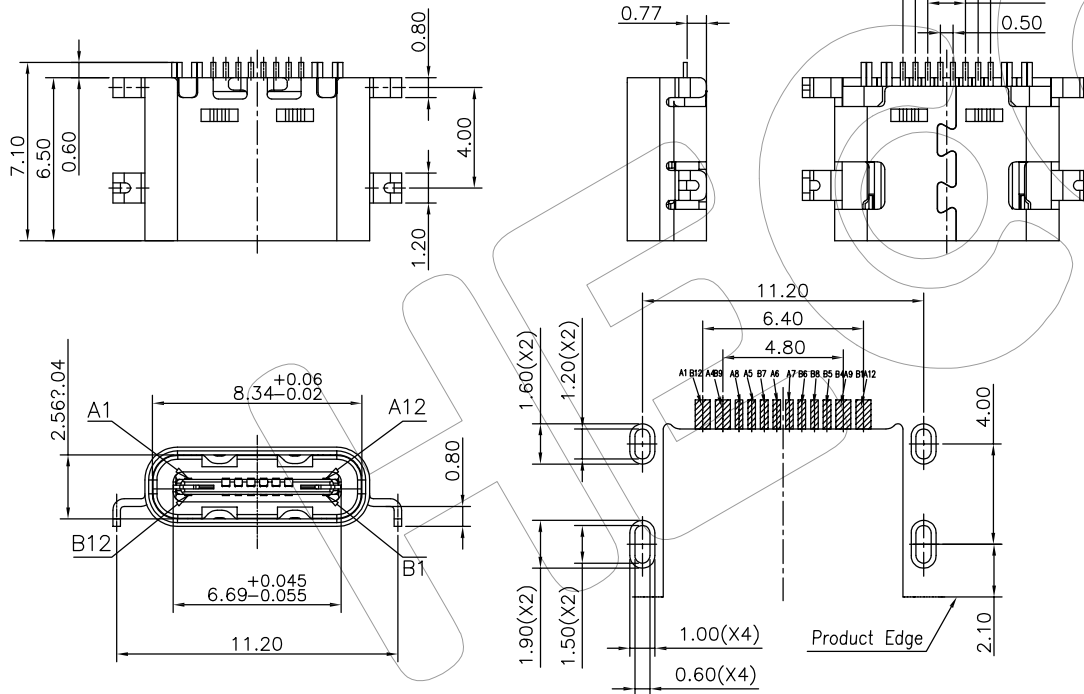

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NO.	NAME	DESCRIPTION
3	CONTACT	COPPER ALLOY
2	INSULATOR	HIGH TEMPERATURE PLASTIC UL 94 V-0
1	SHELL	Stainless Steel

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-USBC-1016-FGB010

TITLE:

USB Type C 16Pin 母头 单排 SMT 外壳短体沉板
0.8mm 端子电镀1u"黑色

A0 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE