




Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

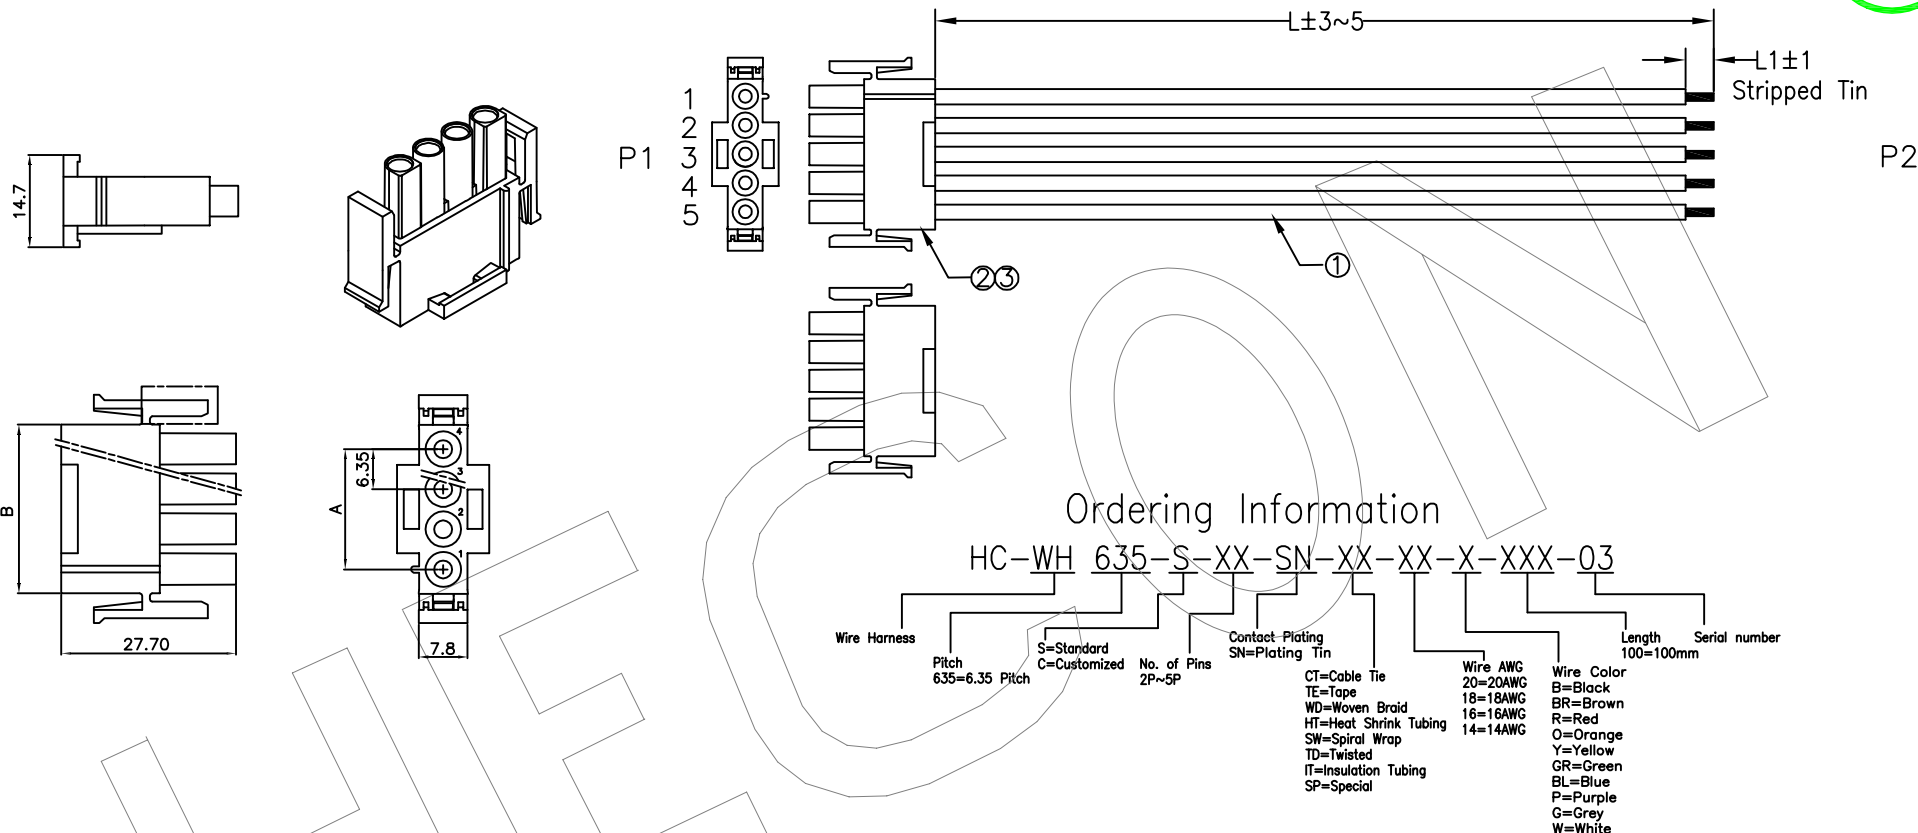

Ordering Information

HC-WH 635-S-XX-SN-XX-XX-X-XXX-03

Wire Harness	Pitch 635=6.35 Pitch	S=Standard C=Customized	No. of Pins 2P~5P	Contact Plating SN=Plating Tin	CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special	Wire AWG 20=20AWG 18=18AWG 16=16AWG 14=14AWG	Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White	Length 100=100mm	Serial number
--------------	-------------------------	----------------------------	----------------------	-----------------------------------	--	--	--	---------------------	---------------

REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

Poles	Part No.		Dimensions mm	
			A	B
2	635-H02	6.35-2P	6.35	14.00
3	635-H03	6.35-3P	12.70	20.35
4	635-H04	6.35-4P	19.05	26.70
5	635-H05	6.35-5P	25.40	33.05

3	6.35 Female terminal,Plating Tin	XPCS
2	6.35 XP Male Housing,Transparent	1PCS
1	20AWG~14AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4		
				X.XXX	±0.10				SHEET	1/1		
A0		2020.04.20	NEW DRAWING			APPROVE			PROJ.	1/1	PART NO.	HC-WH635-S-XX-SN-XX-XX-X-XXX-03
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL					TITLE:	6.35-XP Male TO Stripped Tin