

RoHS


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

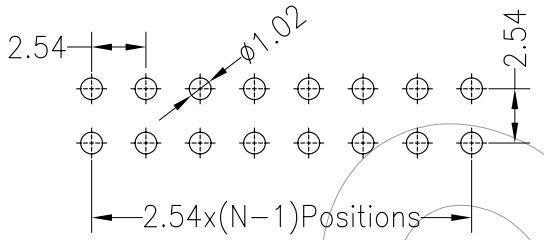


SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

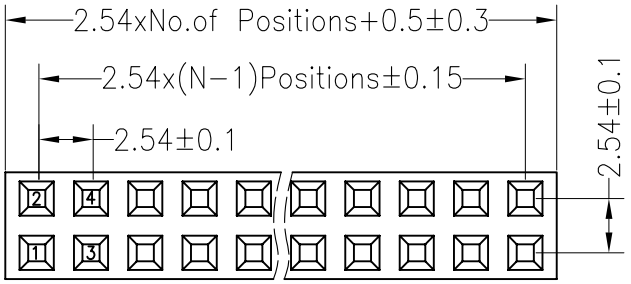

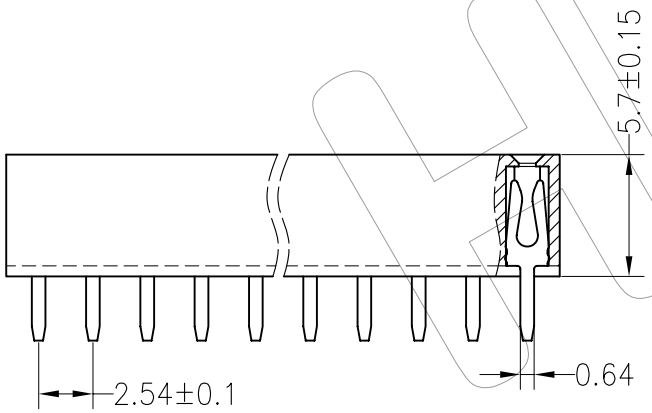



Ordering Information

HC-FH4 57 02 XX X N XX S Y X 01

- No.of Pins Per Row: 2*1~2*40
- Insulator Material Option: A=BK−PBT, B=BK−PA66, C=BK−PA6T, D=BK−PA46, F=BK−LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0		NEW DRAWING	

OPERATION		DRAW	Ayang	SCALE	FIT
X.X	±0.30			UNIT	mm
X.XX	±0.20	CHECK		SIZE	A4
X.XXX	±0.10			SHEET	1/1
Angle	±3°	APPROVE		PROJ.	
DIM	TOL				

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.	HC−FH45702XXXNXXSYX01
TITLE:	2.54mm H5.7 Dual Row Straight Female Header