
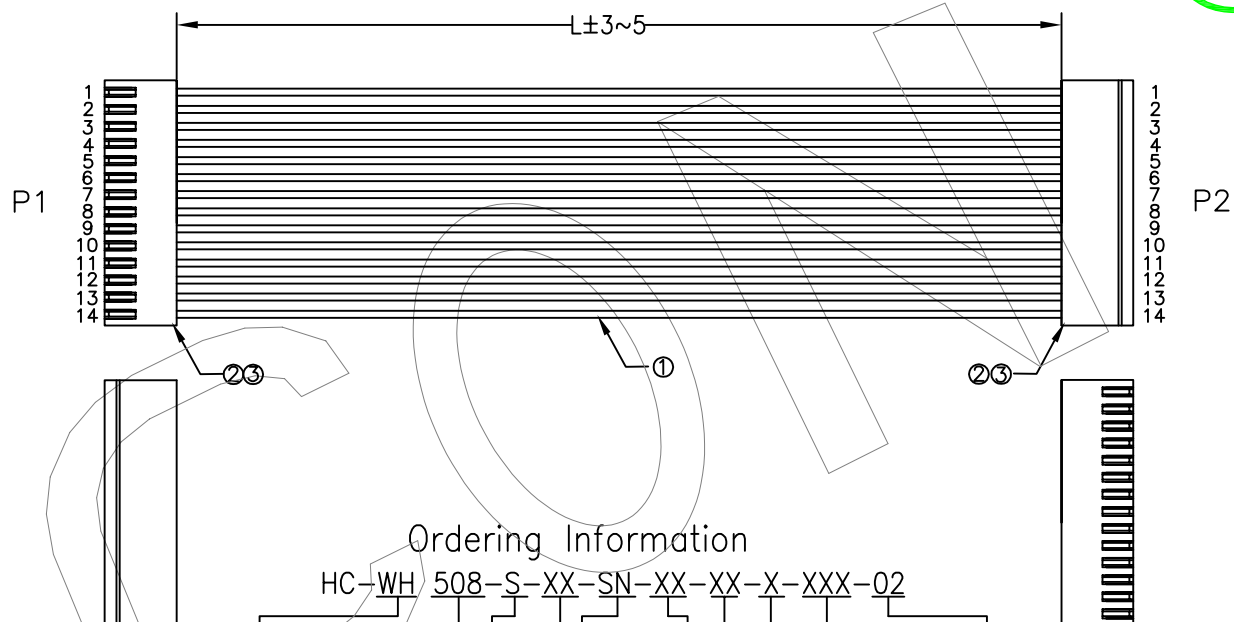




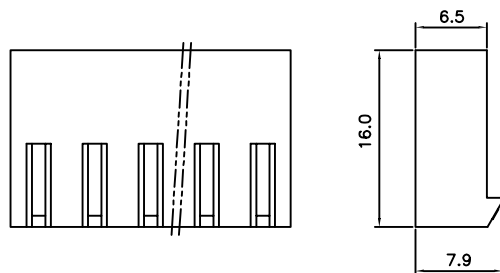

Ordering Information

HC-WH 508-S-XX-SN-XX-XX-X-XXX-02

Wire Harness

Pitch
508=5.08 Pitch

S=Standard
C=Customized

No. of Pins
2P~14P

Contact Plating
SN=Plating Tin

CT=Cable Tie
TE=Tape
WD=Woven Braid
HT=Heat Shrink Tubing
SW=Spiral Wrap
TD=Twisted
IT=Insulation Tubing
SP=Special

Wire AWG
24=24AWG
22=22AWG
20=20AWG
18=18AWG

Wire Color
B=Black
BR=Brown
R=Red
O=Orange
Y=Yellow
GR=Green
BL=Blue

Length
100=100mm

Serial number

Poles	Part No.		Dimensions mm	
			A	B
2	508-H02	5.08-2P	5.08	10.16
3	508-H03	5.08-3P	10.16	15.24
4	508-H04	5.08-4P	15.24	20.32
5	508-H05	5.08-5P	20.32	25.40
6	508-H06	5.08-6P	25.40	30.48
7	508-H07	5.08-7P	30.48	35.56
8	508-H08	5.08-8P	35.56	40.64
9	508-H09	5.08-9P	40.64	45.72
10	508-H10	5.08-10P	45.72	50.08
11	508-H11	5.08-11P	50.08	55.88
12	508-H12	5.08-12P	55.88	60.69
13	508-H13	5.08-13P	60.69	66.04
14	508-H14	5.08-14P	66.04	71.12

REMARKS:

1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

3	5.08 terminal,Plating Tin	XPCS
2	5.08 XP Housing,Transparent	2PCS
1	24AWG~18AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4	PART NO.	HC-WH508-S-XX-SN-XX-XX-X-XXX-02
				X.XXX	±0.10				SHEET	1/1		
A0	2020.04.20	NEW DRAWING				APPROVE			PROJ.		TITLE:	5.08-XP TO 5.08-XP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							