
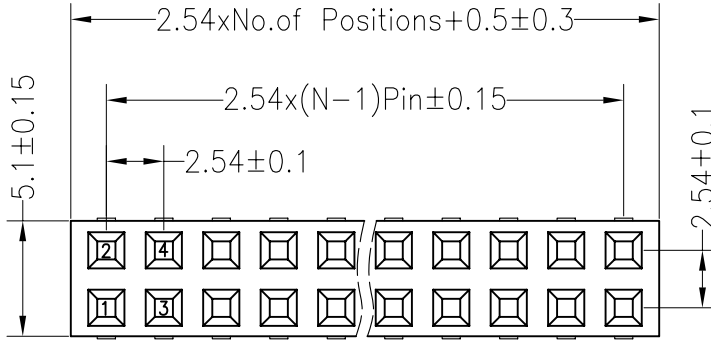
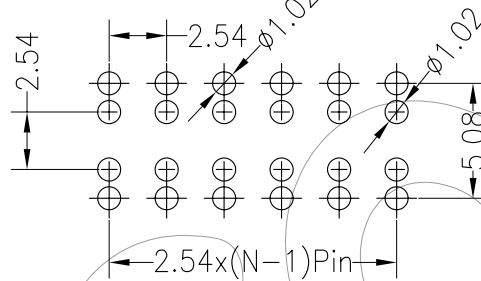
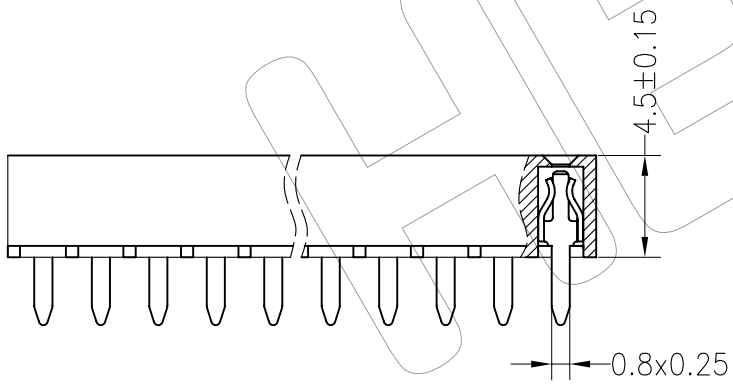




	1	2	3	4	5	6	7	8	9																																									
G	RoHS				SPECIFICATIONS Rated Current:3.0AMP Contact Resistance:20mΩ Max Withstand Voltage:1000V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40°c to +105°c Contact Material:Phosphor Bronze Contact Plating:Au or Sn Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230°C for 30-60 seconds (260°C for 10 seconds)					G																																								
F					Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)					F																																								
E										E																																								
D										D																																								
C										C																																								
B					Ordering Information HC-FH445 02 XX X N XX W U X 01 <table border="0"><tr><td>No. of Pins Per Row 2*2~2*40</td><td>Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP</td><td>Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin</td><td>Packing O=Pe Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar</td></tr></table>					No. of Pins Per Row 2*2~2*40	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Packing O=Pe Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar	B																																				
No. of Pins Per Row 2*2~2*40	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Packing O=Pe Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar																																															
A					<table border="1"><thead><tr><th colspan="2">OPERATION</th><th rowspan="2">DRAW</th><th rowspan="2">Ayang</th><th rowspan="2">SCALE</th><th rowspan="2">FIT</th><th colspan="2" rowspan="2">HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD</th></tr><tr><th>X.X</th><th>±0.30</th></tr></thead><tbody><tr><td>X.XX</td><td>±0.20</td><td>CHECK</td><td></td><td>UNIT</td><td>mm</td><td rowspan="2">PART NO.</td><td rowspan="2">HC-FH44502XXXXXXWUX01</td></tr><tr><td>X.XXX</td><td>±0.10</td><td></td><td></td><td>SIZE</td><td>A4</td></tr><tr><td>Angle</td><td>±3'</td><td>APPROVE</td><td></td><td>SHEET</td><td>1/1</td><td>TITLE:</td><td>2.54mm H4.5 Dual Row SMT Bottom Entry Female Header</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td>PROJ.</td><td></td><td></td><td></td></tr></tbody></table>					OPERATION		DRAW	Ayang	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD		X.X	±0.30	X.XX	±0.20	CHECK		UNIT	mm	PART NO.	HC-FH44502XXXXXXWUX01	X.XXX	±0.10			SIZE	A4	Angle	±3'	APPROVE		SHEET	1/1	TITLE:	2.54mm H4.5 Dual Row SMT Bottom Entry Female Header	DIM	TOL			PROJ.				A
OPERATION		DRAW	Ayang	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD																																												
X.X	±0.30																																																	
X.XX	±0.20	CHECK		UNIT	mm	PART NO.	HC-FH44502XXXXXXWUX01																																											
X.XXX	±0.10			SIZE	A4																																													
Angle	±3'	APPROVE		SHEET	1/1	TITLE:	2.54mm H4.5 Dual Row SMT Bottom Entry Female Header																																											
DIM	TOL			PROJ.																																														
	1	2	3	4	5	6	7	8	9																																									

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

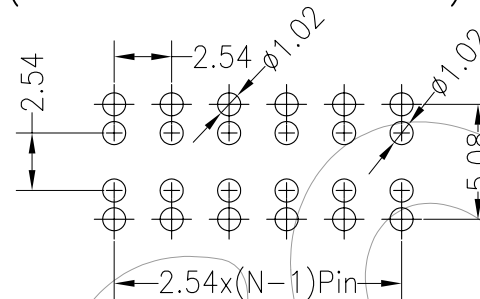

HC-FH445 02 XX X N XX W U X 01

No. of Pins	Insulator Material	Contact	Plating	Packing
Per Row	Option	G0:Gold	Flash	O=Pe Bag
2*2~2*40	A=BK-PBT	G1:3U"	Gold	A=Tray
	B=BK-PA66	G2:5U"	Gold	T=Tube
	C=BK-PA6T	G3:10U"	Gold	P=Tube+Cap
	D=BK-PA46	G4:15U"	Gold	R=Reel+Cap
	E=BK-PA9T	G5:30U"	Gold	M=Reel+Mylar
	F=BK-LCP	S0:Gold	Flash/Tin	
		SN:Tin		

				OPERATION		DRAW	Ayang		SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30							
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	HC—FH44502XXXNXXWUX01
				X.XXX	±0.10							
A0		NEW DRAWING		Angle	±3'	APPROVE			SHEET	1/1	TITLE:	2.54mm H4.5 Dual Row SMT Bottom Entry Female Header
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							