

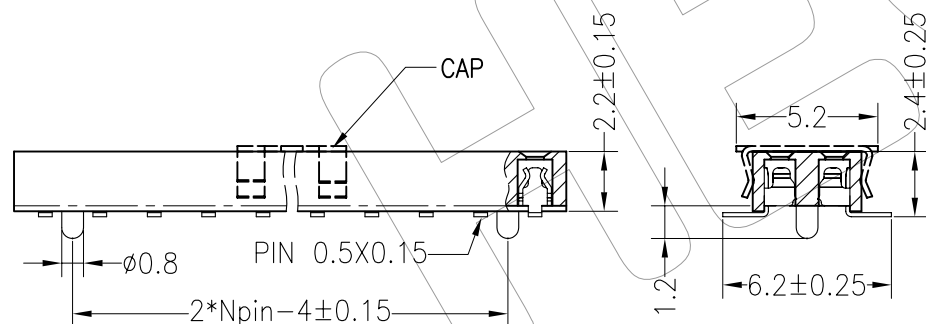
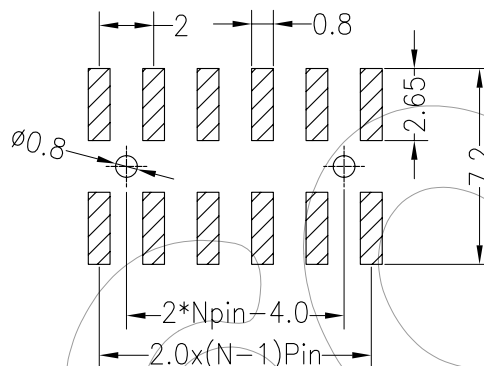


RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

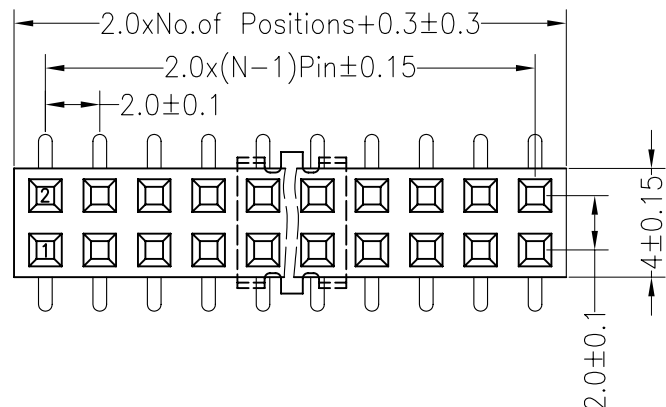

W= With Post



N= W/O Post

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

HC-FH522 02 XX X X XX M U X 01

No.of Pins Per Row 2x2~2*40	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP	Post W=With Post N=W/O Post	Contact Plating G0:Gold Flash G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Packing O=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar
-----------------------------------	--	-----------------------------------	--	---

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^\circ$

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-FH52202XXXXXXMUX01

TITLE:

2.0mm H2.2 Dual Row SMT Female Header

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9