


A

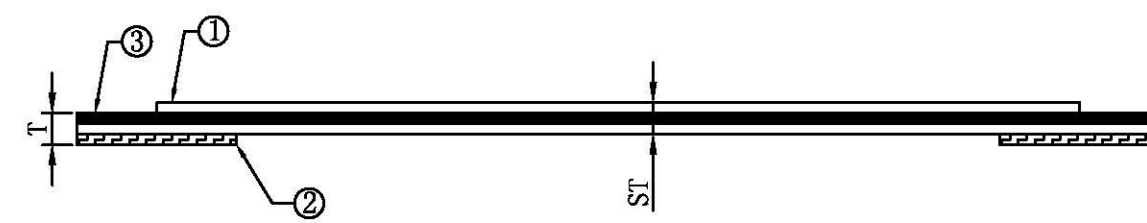

		8	9	0
	STRUCTURE			
NO	ITEM NAME	SPECIFICATION		REMARK
1	INSULATION (绝缘层)	印字UL20624 60um		80°C,60V
		空白60um		
	印字 通用  AWM 20624 80C 60V VW-1			
2	P/TAPE (补强板)	205um 蓝色		
3	CONDUCTOR (锡线) Tin	THICKNESS	0.05	±0.005
		WIDTH	0.8	±0.03
	CONDUCTOR (导体镀层)	PLATED	Sn(40u")	MIN
		PLATED		
4				
5				
6				
7				
8				

DIMENSION			
PITCH (间距)	P	2.54	±0.12
SPAN(全间距)	SP	38.1	±0.18
WIDTH(总宽度)	W	43.18	±0.18
MARGIN(边距)	M	2.54	±0.18
INSERT THICKNESS (插入厚度)	T	0.32	±0.03
SURFACE THICKNESS (线身厚度)	ST	0.17	±0.03
PROTECTOR LENGTH (补强板长度)	B1	8.0	±1.0
	B2	8.0	±1.0
STRIP LENGTH (金手指长度)	S1	4.0	±0.5
	S2	4.0	±0.5
INSULATION LENGTH (绝缘层长度)	I.L	67	±2.0
TOTAL LENGTH (产品总长度)	T.L	75	±2.0
NO of PIN(导体数量)	16P		

1. 成品之两端内外CB为0—0.5mm

HECON P /N # HC-FFC-254-16P-XXX-A-01				东莞市禾康电子有限公司					
SER	DESCRIPTION	OP	DATE	TITLE					
A	首次绘图			2. 54*16P*75-4/4/8/8 A					
				CHECKED		CUSTOMER		REV	A
					UNIT mm		SIZE A4	SHEET	1/1