
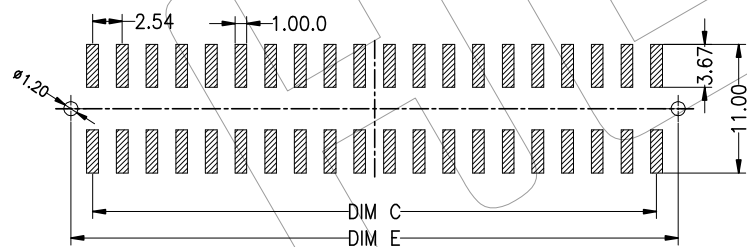
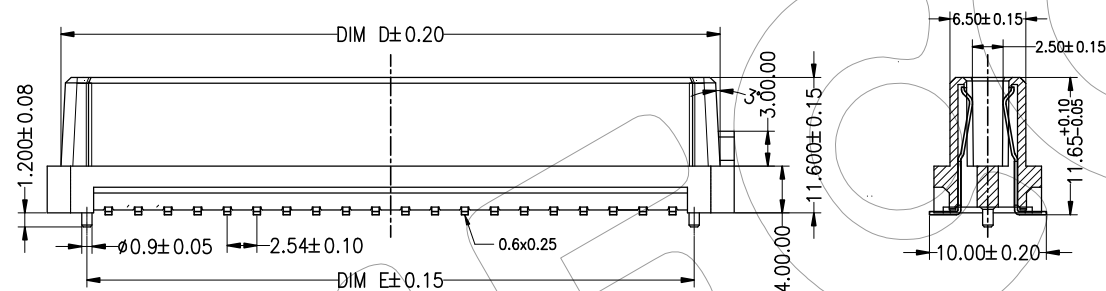


RoHS

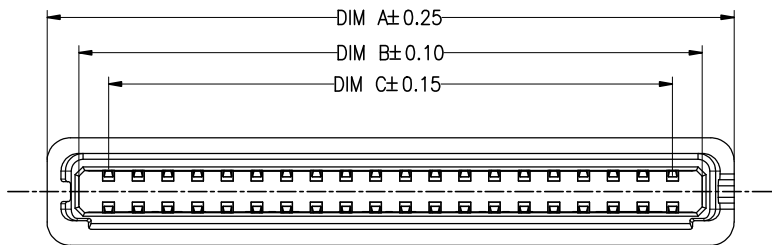

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

SPECIFICATIONS PERFORMANCE

Electical Rating:AC/DC 250V 3A
Insulation Resistance:500M Ω Min.
Contact Resistance:20m Ω Max
Withstang Volt:1000V AC/minute
Opratng Temperature:-40°C to+125°C
Material
Contact Material:Copper Alloy
Housing:LCP UL94V0
Soldering temperature:260 ! 5" 5S

53.70	47.50	43.18	51.30	46.88	2X18P
48.62	42.42	38.10	46.22	41.80	2X16P
DIM A	DIM B	DIM C	DIM D	DIM E	PIN No.

Ordering Information

HC-BTB25	F	040	116	XX	F	X	01
F=Female M=Male	No.of pins 040:2X20P	Plastic Height 116=11.6mm	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin	Insulator Option F=LCP	Material	Packing T:Tube	

OPERATION

X.X	$\pm$ 0.30
X.XX	$\pm$ 0.20
X.XXX	$\pm$ 0.10
Angle	$\pm$ 3°
DIM	TOL

DRAW

Lu jin ying

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-BTB25-F040116XXFX01

TITLE:

2.54mm BTB 2x20Pin H11.6 Female

A

A