


RoHS



A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	VBUS	SBU1	D-	D+	CC	VBUS	TX1-	TX1+	GND
GND	TX2+	TX2-	VBUS	Vconn			SBU2	VBUS	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

技术参数:

1. 电器特性:

额定电流: 3A 最大.
额定电压: 20V/DC 最大.
耐电压: 交流 100V 最小.
绝缘阻抗: 100 MΩ 最小.
接触阻抗: 40 mΩ 最大.
耐久后接触阻抗: 50 mΩ 最大





2. 环境特性:

工作环境温度: -30°C~+85°C.


3. 机械特性:

插入力: 5~20Nf.
拔出力: 8~20Nf.
耐久: 10000 Cycles.
耐久后插入力: 5~20Nf.
耐久后拔出力: 6~20Nf


4. 盐雾: 24H

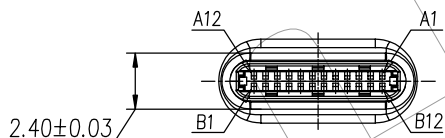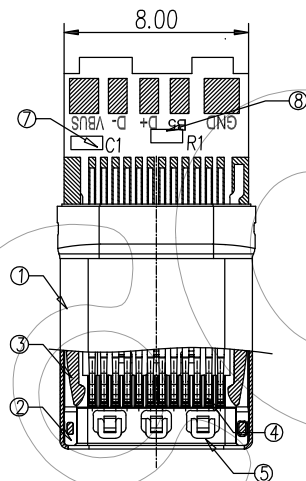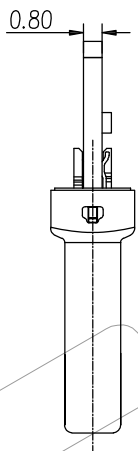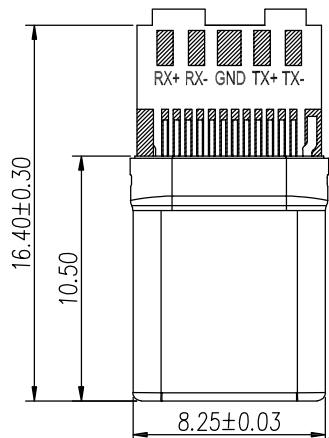

P2	B5	P8	A1,A12,B1,B12,Shell	P9	A2
P3	A6	P7	B10	P10	A3
P4	A7	P6	B11	R1	56KΩ
P5	A4,A9,B4,B9	P1	A1,A12,B1,B12,Shell	C1	10nf

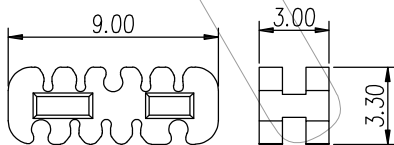

线夹尺寸图

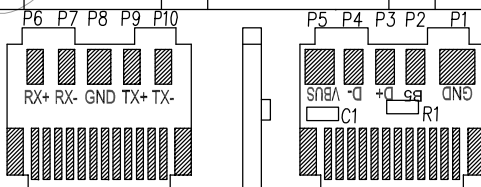

8	电容	10 Nf
7	电阻	56KΩ
6	P.C.B	FR4
5	接地片	不锈钢201, T=0.10±0.01mm
4	端子	磷铜, 电镀 Au 1u", T=0.15±0.01mm
3	卡勾	不锈钢201, 电镀 SN 80u", T=0.35±0.01mm
2	塑胶	LCP UL94V-0;
1	外壳	不锈钢316, T=0.15±0.01mm
NO.	NAME	DESCRIPTION

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-USBC 1024-FGXXXX

TITLE:

USB Type C 24Pin Male 夹板式成品10焊点(拉伸壳)

1

2

3

4

5

6

7

8

9

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

APPROVE

Ayang

PROJ.

TITLE:

USB Type C 24Pin Male 夹板式成品10焊点(拉伸壳)

1

2

3

4

5

6

7

8

9