


RoHS

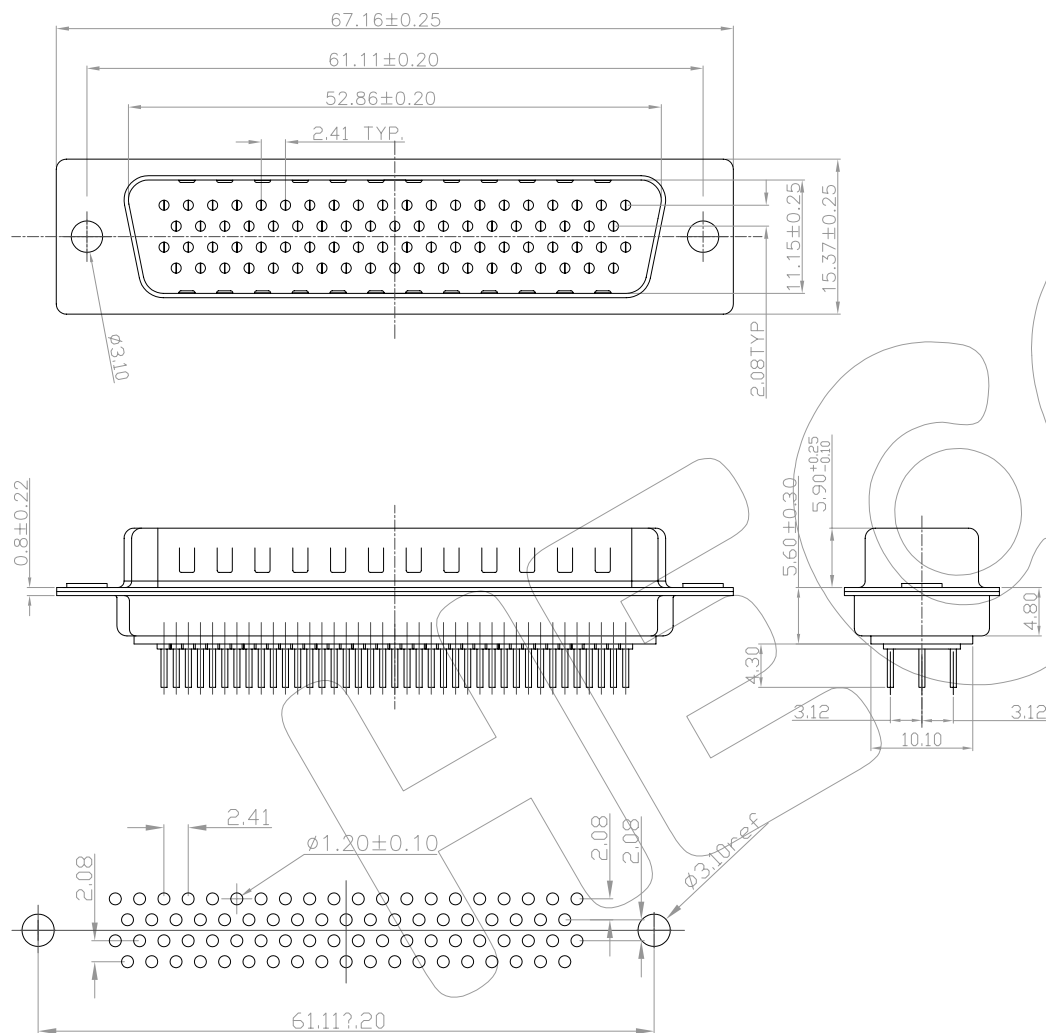

REMARK/注释:

1. CHARACTERISTICS/特性:

1.1. RATED VOLTAGE: 250V

额定电压: 250伏特

1.2. RATED CURRENT: 3AMP

额定电流: 3安培

1.3. CONTACT RESISTANCE: 25mohms MAX. INITIAL; 40mohms MAX. AFTER

接触阻抗: 初始 25mohms 最大; 最终 40mohms 最大

1.4. INSULATION RESISTANCE: 5000Mohms MIN. at 500V DC

绝缘阻抗: 5000兆欧 最小, 在500伏直流电下

1.5. DIELECTRIC STRENGTH: 750VRMS

耐电压: 750伏特

1.6. OPERATING TEMPERATURE RANGE: $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$

工作温度: $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$

2. MATERIAL/材质:

2.1. INSULATORS: PBT+30% G. F (UL94V-0) BLACK

胶芯: PBT+30% G. F (UL94V-0) 黑色

2.2. CONTACTS: BRASS C2800R-H, GOLD (G/E) TOP OVER CONTACT AREA, 80-120u" BRIGHT-TIN TOP OVER SOLDER AREA, 40-60u" NICKEL UNDER PLATE.

端子: 黄铜 (C2800R-H), 镍底40-60u", 接触部位镀金 (G/F), 焊接部位镀亮锡80-120u"

2.3. FRONT SHELL: SPCC, 80-120u" NICKEL TOP OVER, 40-60u" COPPER UNDER PLATE.

前壳: SPCC, 铜底40-60u", 镀镍80-120u".

2.4. BACK SHELL: SPCC, 80-120u" BRIGHT TIN TOP OVER, 40-60u" COPPER UNDER PLATE.

后壳: SPCC, 铜底40-60u", 镀亮锡80-120u".

2.5. NUT: COPPER ALLOY (C3602), 80-120u" NICKEL PLATED

螺母: 铜合金 (C3602), 镀镍80-120u".

Ordering Information

HC-DB35-11 XX M S0 B 01

No. of Pins
15, 26
44, 62, 78P

Connector Type
F=Female
M=Male

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^{\circ}$

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

ϕ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO., LTD

PART NO.

HC-DB35-11XXMS0B01

TITLE:

HD D-SUB NPin Male Connector, Straight