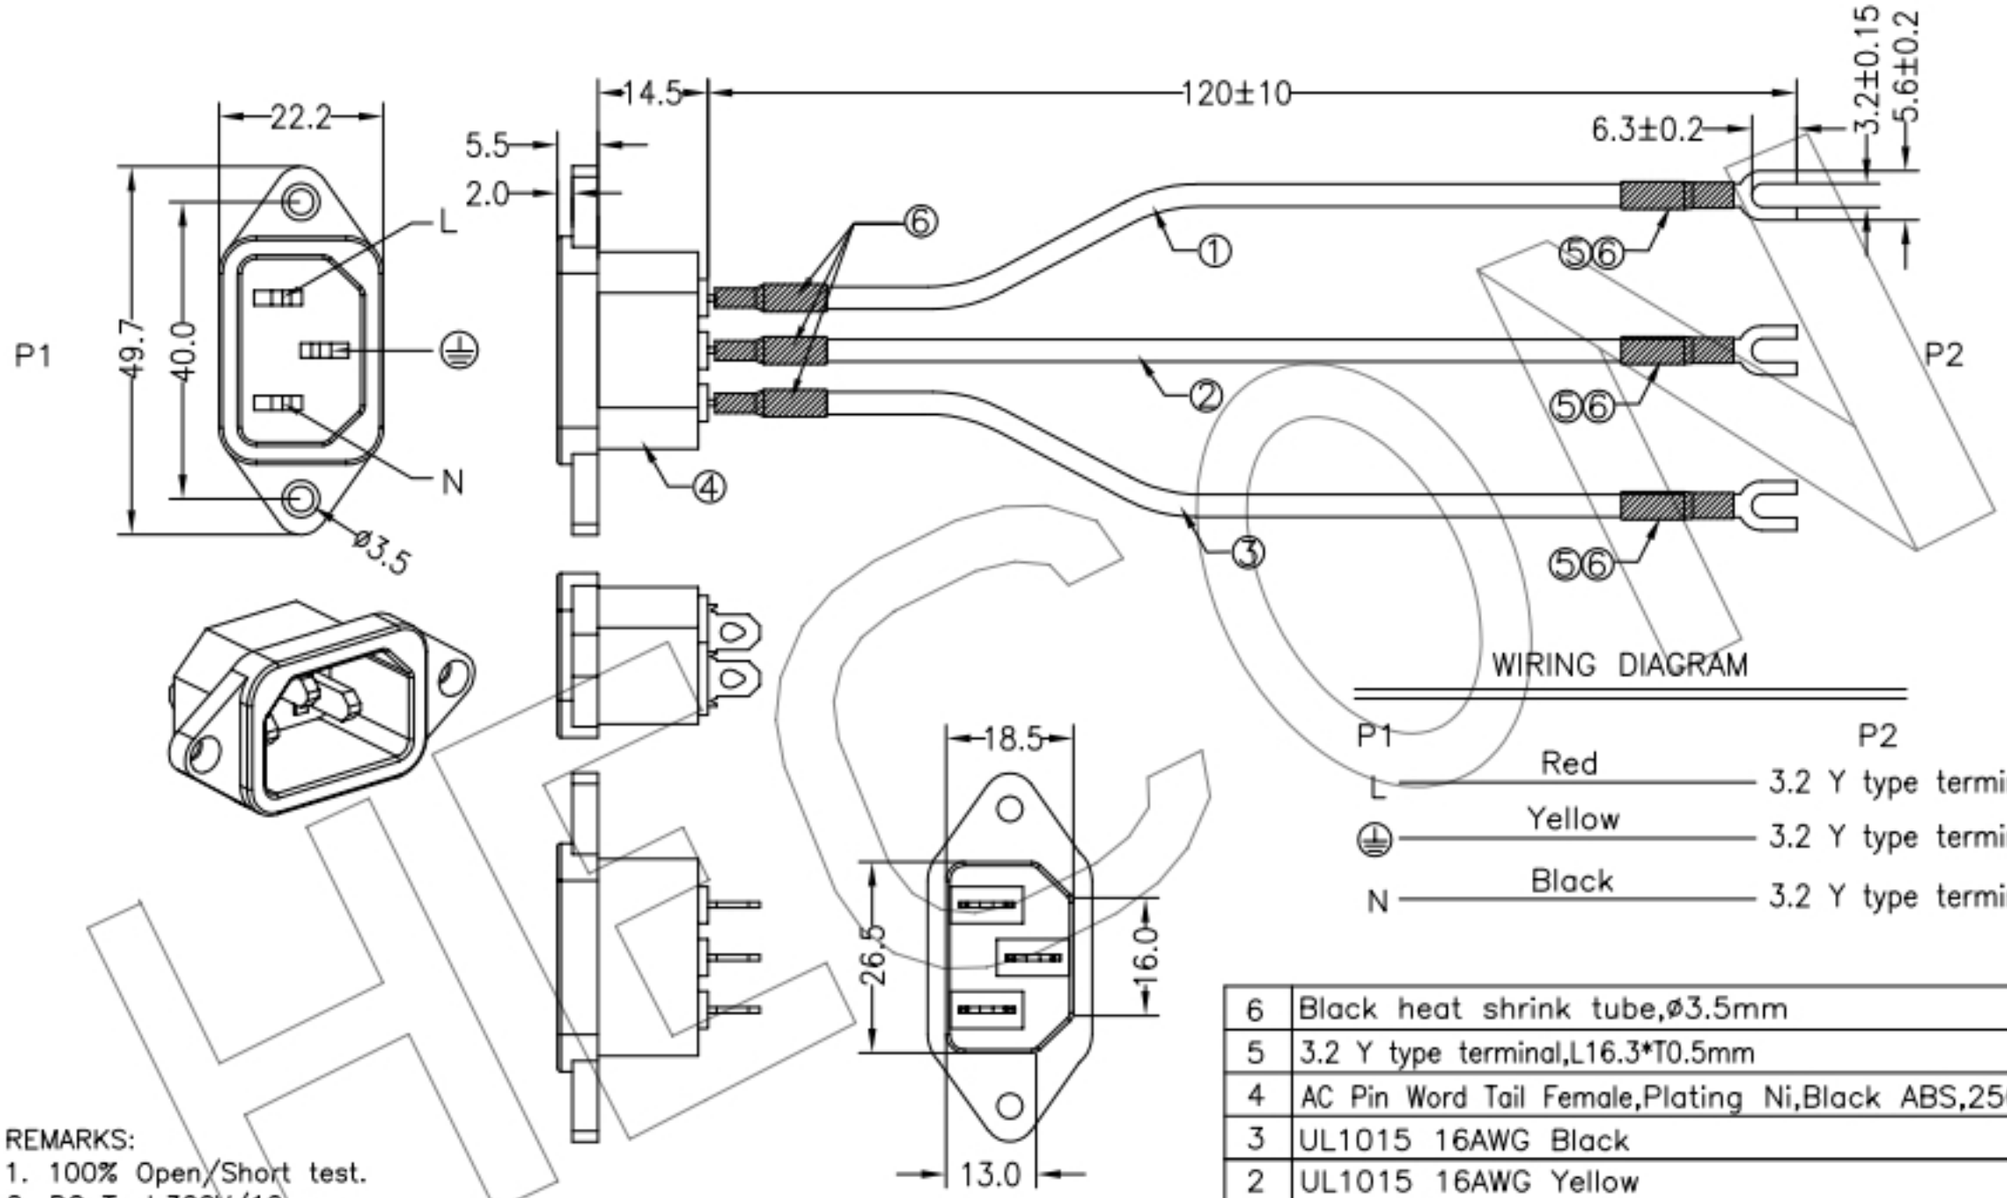


WIRING DIAGRAM

P1		P2
L	Red	3.2 Y type terminal
⏚	Yellow	3.2 Y type terminal
N	Black	3.2 Y type terminal

NO.	MATERIAL&SPECIFICATION	Q'ty
6	Black heat shrink tube,ø3.5mm	6PCS
5	3.2 Y type terminal,L16.3*T0.5mm	3PCS
4	AC Pin Word Tail Female,Plating Ni,Black ABS,250V-10A	1PCS
3	UL1015 16AWG Black	1PCS
2	UL1015 16AWG Yellow	1PCS
1	UL1015 16AWG Red	1PCS

REMARKS:
1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.10.29	NEW DRAWING	

OPERATION		DRAW	BoFeng	2021.10.29
X.X	±0.30			
X.XX	±0.20	CHECK	Jack L	2021.10.29
X.XXX	±0.10			
DIM	TOL	APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.	HC-AC Pin Word Tail Female-120-01
TITLE:	AC Pin Word Tail Female TO 3.2 Y type terminalx3 L=120MM