

RoHS

SPECIFICATIONS

Rated Current:0.75AMP

Contact Resistance:30mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: LCP

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

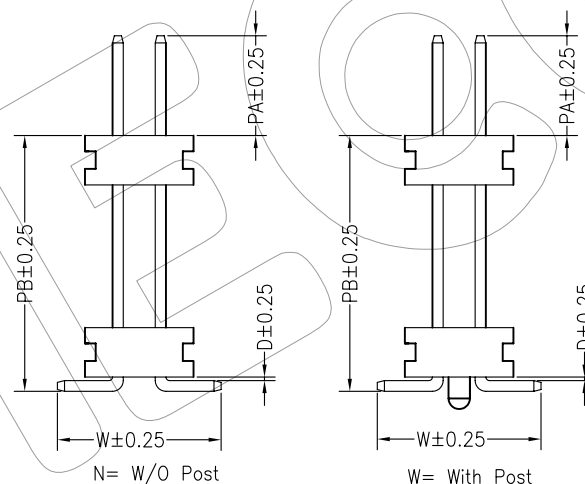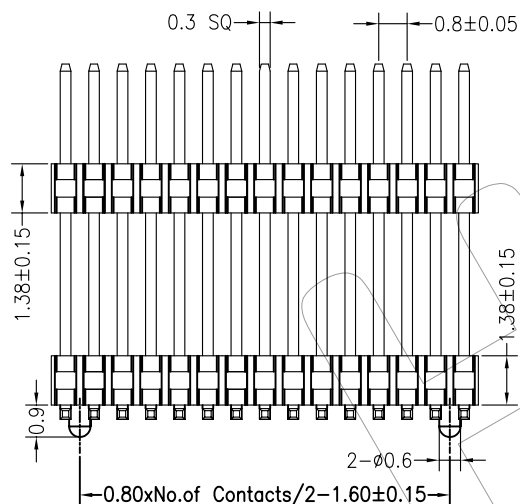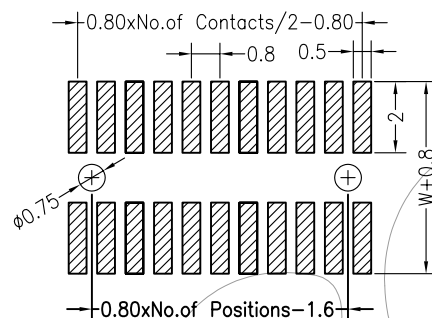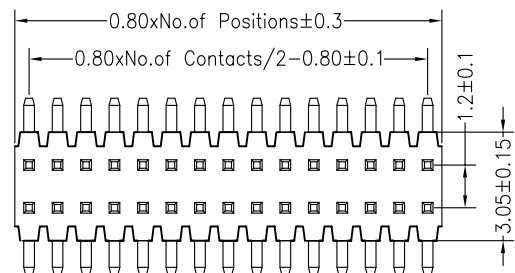

Ordering Information

HC-PH913 22 XX X M XX X XXX X 01

No.of Pins Per Row	Insulator Material Option	Contact Plating	Post	Pin Length	Packing
2x50 2~100	A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP	G0:Gold Flash G2:50U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	W=With Post N=W/O Post		0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar

Dimension antitheses list					
ITEM	PA	D	PB	W	L
Standard	2.80	0.1	3.20	4.60	7.40
Alternate					

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

Ayang

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PH91322XXMXXXXXXX01

TITLE:

0.8x1.2mm Dual Row SMT Pin Header

A0 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE