




Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

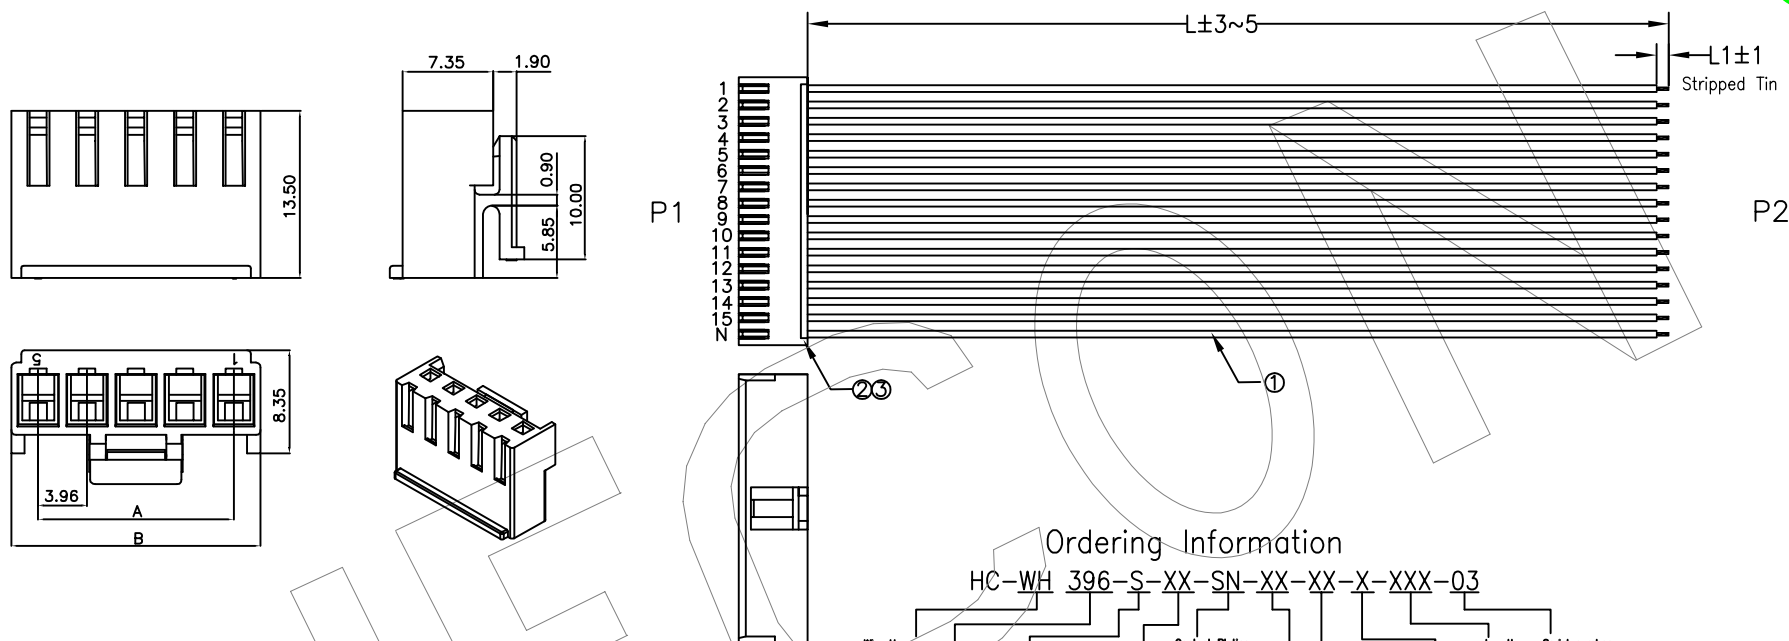

Ordering Information

HC-WH 396-S-XX-SN-XX-XX-X-XXX-03

Wire Harness	Pitch: 396=3.96 Pitch	S=Standard C=Customized	No. of Pins 2P~16P	Contact Plating SN=Plating Tin	CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special	Wire AWG 26~26AWG 24~24AWG 22~22AWG 20~20AWG 18~18AWG	Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White	Length 100~100mm	Serial number
--------------	-----------------------	----------------------------	-----------------------	-----------------------------------	--	--	--	---------------------	---------------

Poles	Part No.	Dimensions mm	
2	VH396-H02	VH3.96-2P	3.96 8.52
3	VH396-H03	VH3.96-3P	7.92 12.48
4	VH396-H04	VH3.96-4P	11.88 16.44
5	VH396-H05	VH3.96-5P	15.84 20.40
6	VH396-H06	VH3.96-6P	19.80 24.36
7	VH396-H07	VH3.96-7P	23.76 28.32
8	VH396-H08	VH3.96-8P	27.72 32.28
9	VH396-H09	VH3.96-9P	31.68 36.24
10	VH396-H10	VH3.96-10P	35.64 40.20
11	VH396-H11	VH3.96-11P	39.60 44.16
12	VH396-H12	VH3.96-12P	43.56 48.12
13	VH396-H13	VH3.96-13P	47.52 52.08
14	VH396-H14	VH3.96-14P	51.48 56.04
15	VH396-H15	VH3.96-15P	55.44 60.00
16	VH396-H16	VH3.96-16P	59.40 63.96

REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

3	VH3.96 terminal,Plating Tin	XPCS
2	VH3.96 XP Housing,White	1PCS
1	26AWG~18AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

DRAW

BoFeng

2020.04.20

SCALE

FIT

UNIT

mm

SHEET

1/1

PROJ.

◆

HECON

东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-WH396-S-XX-SN-XX-XX-X-XXX-03

TITLE:

VH3.96-XP TO Stripped Tin

A

A