


RoHS

NOTE

- 1.Material
Plunger: Brass C3604
Barrel: Brass C3604
Spring: SUS304
- 2.Plating
Plunger: 3 micro-inch minimum Au over 50 micro-inch Min. nickel
Barrel: 3 micro-inch minimum Au over 50 micro-inch Min. nickel
- 3.Electrical
Rated current & voltage: DC 12V; 2A MAX .
Contact resistance: 50 mohm maximum at working height
- 4.Mechanical
Spring force: 75g±20% at working height
Durability: 10,000 cycles(minimum)
- 5.RoHS compliant product.
- 6.Mark * is the key control dimension
- 7.Pass the salt spray test for 48 hours

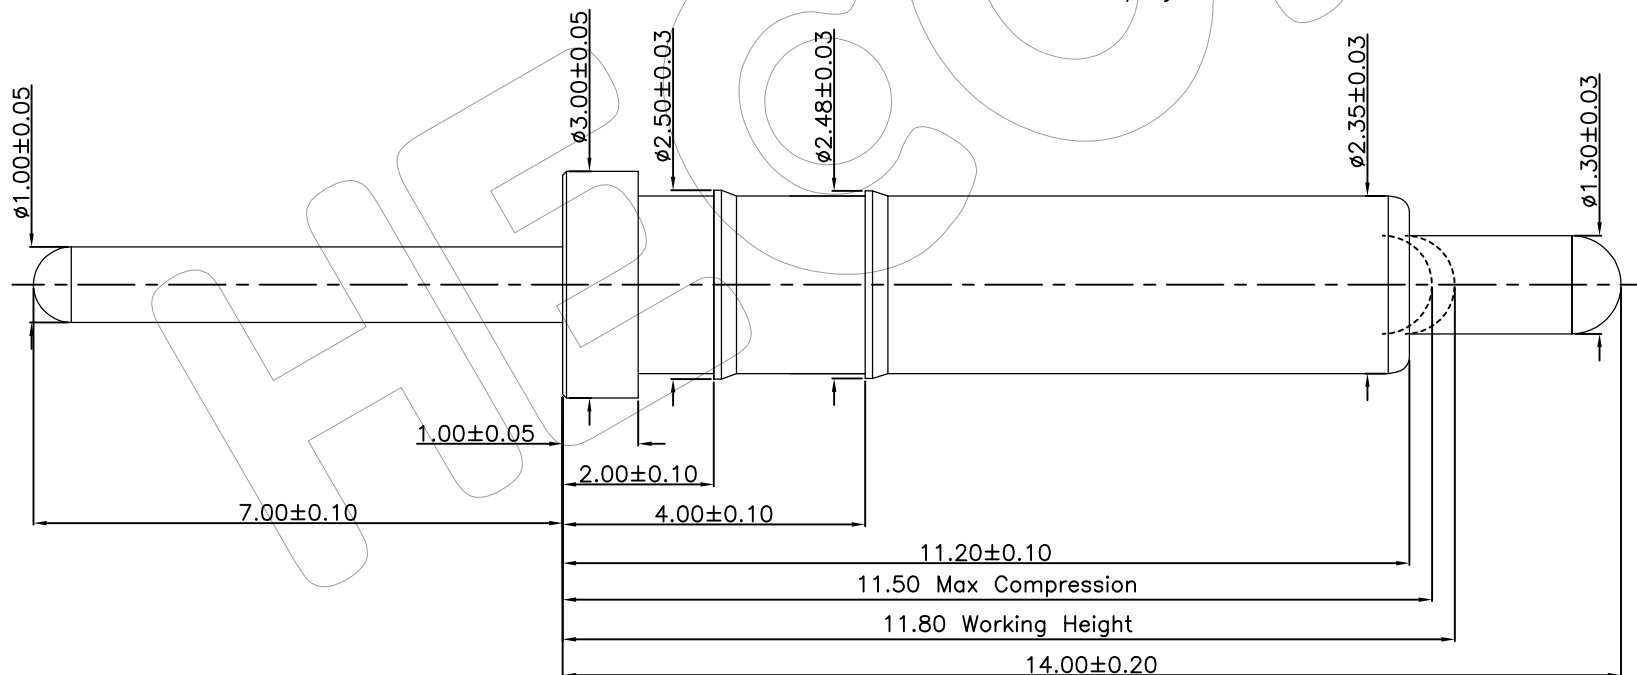

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PGP-B-210-2.2-G1-01

TITLE:

POGO PIN

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9