
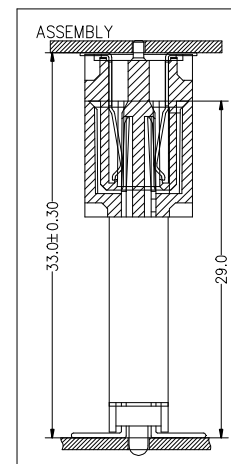
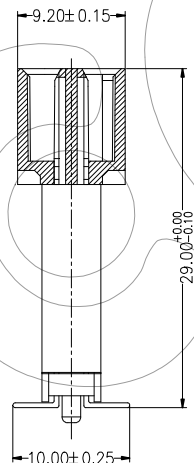
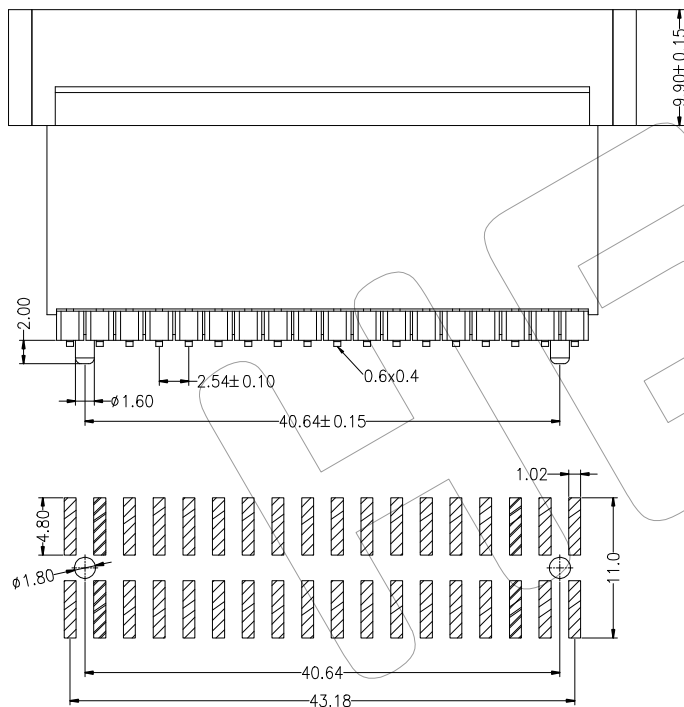


RoHS

SPECIFICATIONS
PERFORMANCE

Electical Rating:AC/DC 250V 3A
Insulation Resistance:500MΩ Min.
Contact Resistance:20mΩ Max
Withstang Volt:1000V AC/minute
Oprating Temperature:-40°C to+125°C
Material
Contact Material:Copper Alloy
Housing:LCP UL94V0
Soldering temperature:260 ± 5" 5S

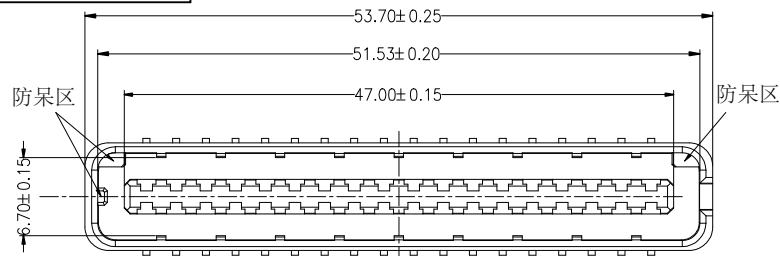

Ordering Information

HC-BTB25 M 040 290 XX F X M X

F=Female
M=Male
No. of pins
040:2X20P
Plastic Hight
305=30.5mm
Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
Insulator Material
Option
F=LCP
Contact Shape
M=SMT

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

OPERATION

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW

Lu jin ying

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-BTB25-M040290XXFXMX

TITLE:

2.54mm BTB 2x20Pin H29.0 Male SMT

A0 2023.05.29 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE