
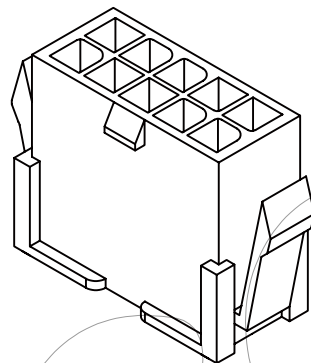


RoHS

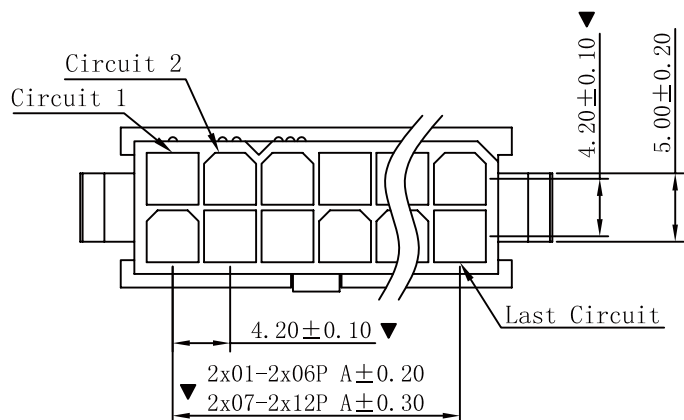



☑ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: 20m Ω max

☑ HOUSING

- Part No.: HC-H4202-2xNP
- Poles: 02-24P
- Housing Material: Nylon66 UL94V-2 or UL94V-0
- Mates With: HC-H4201 dual row receptacle
- Use With: HC-T4201 terminals
- The Dimension Marked "▼" Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

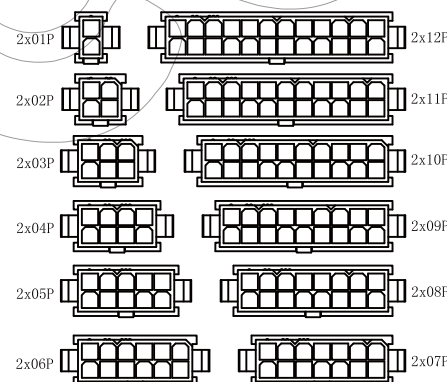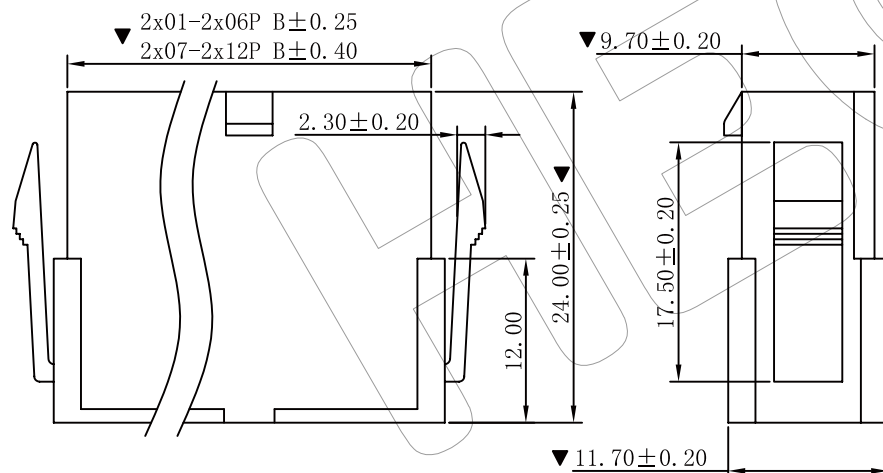

CIRCUIT SIZE LAYOUT

HC-H4202-2xNP-XX

- None: Pa66-V2 Natural
- BK: Pa66-V2 Black
- V0: Pa66-V0 Natural
- VOBK: Pa66-V0 Black

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

Ayang

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-H4202-2xNP-XX

TITLE:

MX4.20mm 2xNP Female Housing Connector Series

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9