



RoHS



特性注解:

1.电气特性:

额定电流: 5 A 最大

电源PIN及接地PIN1.25 A 每PIN

其它 PIN 0.25 A

工作电压: 20V Max.

介质承受电压: AC 100V /1分钟

绝缘阻抗: 100 MΩ 最小.

接触阻抗: 40 mΩ 最大.

2.环境:

工作温度: -40°C~+85°C.






3.机械特性:

插入力: 5~20Nf.

拔出力: 6~20Nf.

耐久寿命: 3000 Cycles.

4.盐雾: 24H

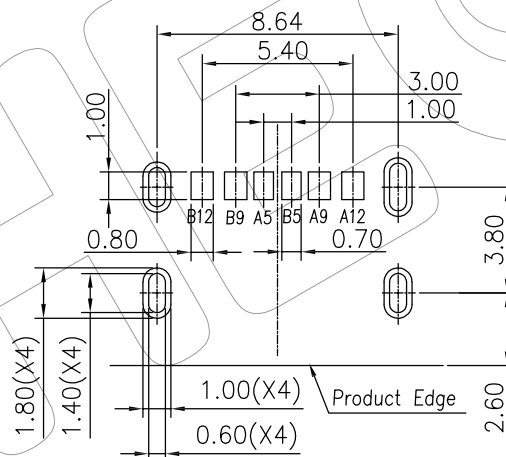

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

|     |             |     |             |
|-----|-------------|-----|-------------|
| A5  | CC1         | B5  | CC2         |
| A9  | VBUS        | B9  | VBUS        |
| A12 | GND         | B12 | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司  
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-USBC1006-FGB012

TITLE:

USB Type C 6Pin 母头成品 普通款

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9