

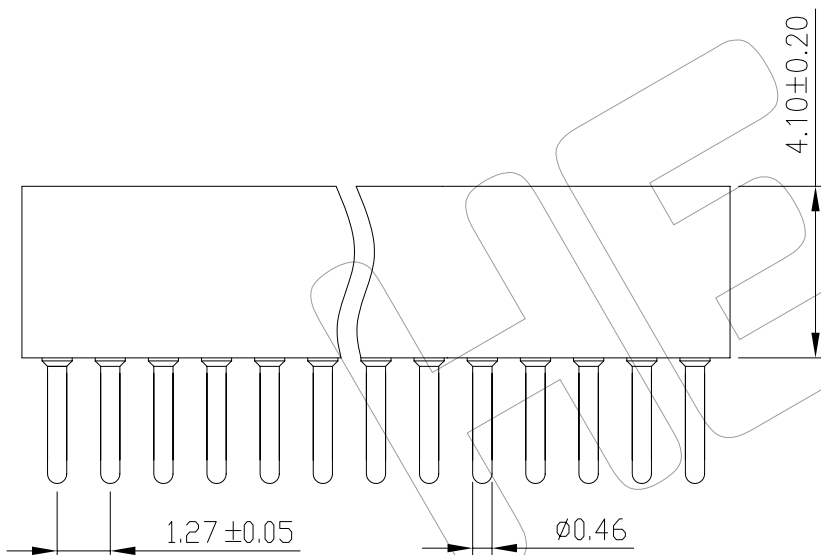


RoHS

Technical Specs:

Insulator: Black glass filled polyester PPS
Flammability: UL 94V-0
Sleeve: Brass (H59-3)
Contact clip(3 finger): Beryllium copper(C17300)
Accepted pin: $\varnothing 0.38$ to 0.50mm
Forces: (polished steel gauge $\varnothing 0.41\text{mm}$)
--Insertion 0.5 N typ
--Withdrawal 0.2 N typ
Mechanical life: min500 cycles
Rated current: 1A
Contact resistance: max 20m Ω
Dielectric resistance:Min 500V RMS

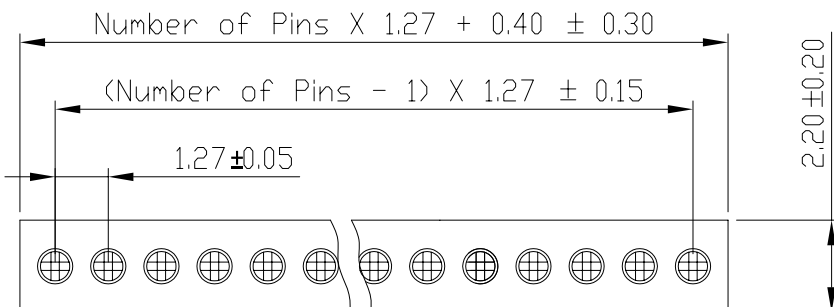

Ordering Information

HC-MF724 41 1 XX S XX 064 01

Insulator Type Code
1: Single row
2: Double row

No. of Pins
1x40Pins
2x40Pins

Contact Plating
SN: Tin
G0: Gold Flash
G2: 2U"Gold
G3: 3U"Gold
G4: 5U"Gold
G5: 10U"Gold
S0: Gold Flash/Tin
Standard: G0

Pin Length
064=6.4mm

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^\circ$

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ ∇

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MF724411XXSXX06401

TITLE:

1.27x4.1mm Machine Female Header Straight
L=6.4