

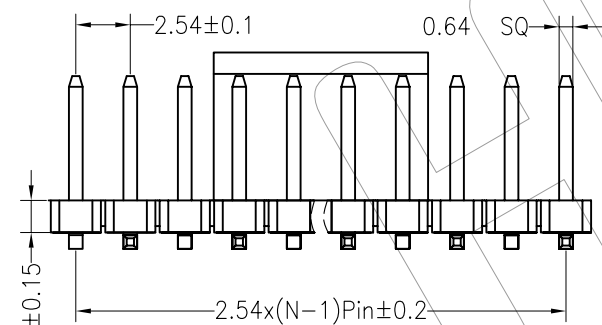
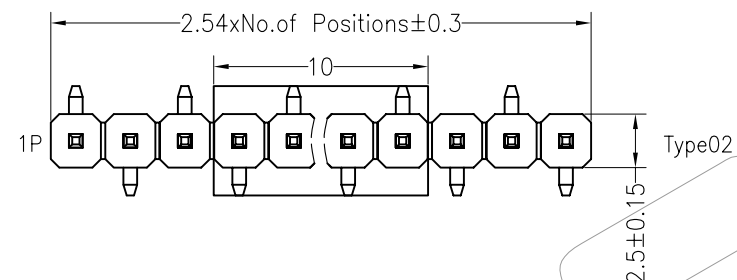
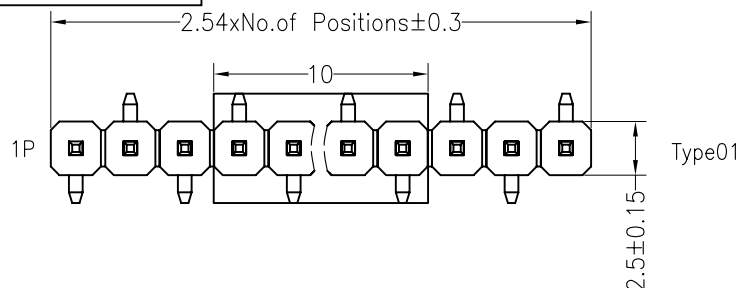


RoHS



Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	6.00	2.20	5.10	10.0
Alternate				

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

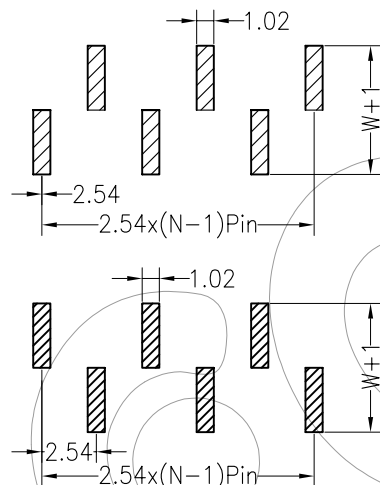

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

HC-PH415 1 1 XX X N XX M XXX X 01(2)

No.of Pins Per Row 1*40	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP	Post W=With Post N=W/O Post	Contact Plating G0:Gold Flash G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Pin Length	Packing Q=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar
-------------------------------	---	-----------------------------------	--	------------	---

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

Ayang

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PH41511XXNXXMXXXX01(2)

TITLE:

2.54mm H1.5 Single Row SMT Pin Header

1P

Type01

1P

Type02

1.5±0.15

PA±0.25

PB±0.25

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

APPROVE

Ayang

PROJ.

PROJ.

TITLE:

2.54mm H1.5 Single Row SMT Pin Header