

RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ C to +105 $^{\circ}$ C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

Dimension antitheses list			
ITEM	PA	PC	PB
Standard	4.00	2.30	
Alternate			

Ordering Information

HC-PH71622 XX X S XX N XXX X 01





No.of
Pins
Per Row
2*1~2*50

Insulator Material
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
0=PE Bag
A=Tray
T=Tube
P=Tube+Cap

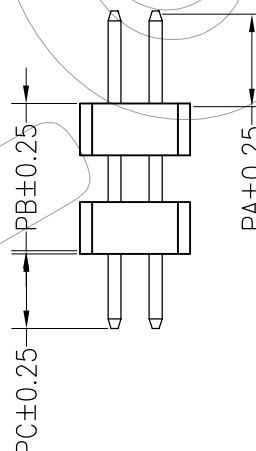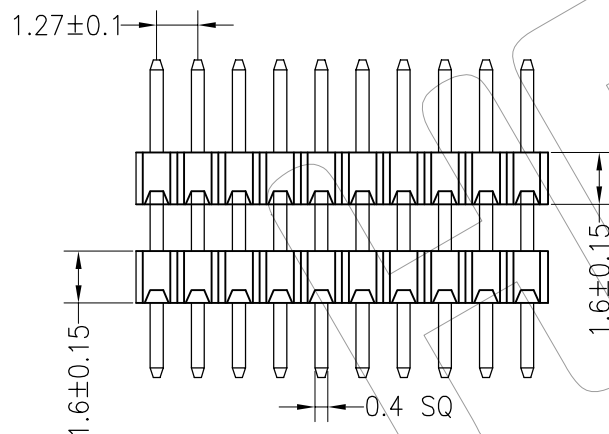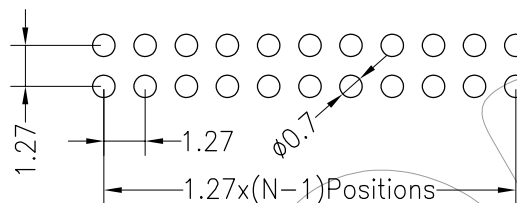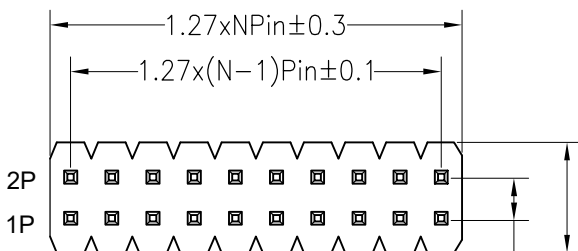

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^{\circ}$

DIM TOL

DRAW

CHECK

APPROVE

Lu jin ying

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

1/1

HECON

东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PH71622-XXXSXXNXXXX01

TITLE:

1.27PH 2xnPin 2+H1.6mm 180 $^{\circ}$

G
F
E
D
C
B
A

G
F
E
D
C
B
A