


RoHS



A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND			VBUS	SBU1	D-	D+	CC	VBUS			GND
GND			VBUS	Vconn			SBU2	VBUS			GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

技术参数:

1. 电器特性:

额定电流: 3A 最大.
额定电压: 20V/DC 最大.
耐电压: 交流 100V 最小.
绝缘阻抗: 100 MΩ 最小.
接触阻抗: 40 mΩ 最大.
耐久后接触阻抗: 50 mΩ 最大





2. 环境特性:

工作环境温度: -30℃~+85℃.

3. 机械特性:

插入力: 5~20Nf.
拔出力: 8~20Nf.
耐久: 10000 Cycles.
耐久后插入力: 5~20Nf.
耐久后拔出力: 6~20Nf

4. 盐雾: 24H

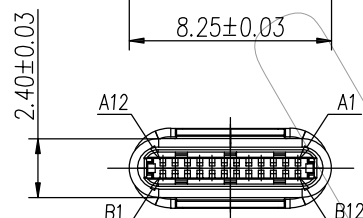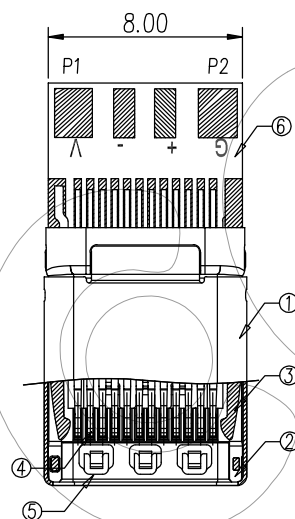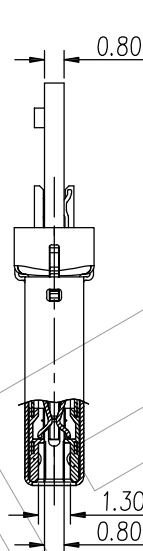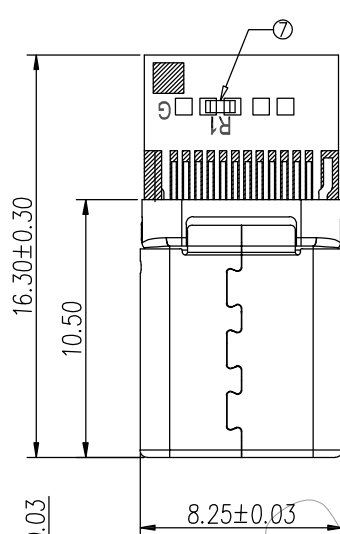

P1	A4, A9, B4, B9	P4	A1, A12, B1, B12, Shell
P2	A7	P5	A1, A12, B1, B12, Shell
P3	A6	R1	56KΩ
P5		P1	A4, A9, B4, B9
		P2	A7
		P3	A6
		P4	A1, A12, B1, B12, Shell
		P5	A1, A12, B1, B12, Shell
		R1	56KΩ

7	电阻	56KΩ
6	P.C.B	FR4
5	接地片	不锈钢201, T=0.10±0.01mm
4	端子	磷铜, 电镀 Au 1u", T=0.15±0.01mm
3	卡勾	不锈钢201, 电镀 SN 80u", T=0.35±0.01mm
2	塑胶	LCP UL94V-0;
1	外壳	不锈钢201, T=0.15±0.01mm
NO.	NAME	DESCRIPTION

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-USBCE104-C24XXX

TITLE:

USB Type C 24Pin Male 夹板式成品 4焊点(冲压壳)

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9