


Ordering Information

HC-PGC	Type	Length A	NO.OFPIN	SR	Plating		
					Plunger	Barrel	Packing
C=Connector	SMT/平底= A	XXX	1P-12P	XX	针轴膜厚	针管膜厚	1= Bag
	Dip/ 插板= B				G1=3U"	G1=3U	T=Tube
	Solder /焊线=C				G2=5U"	G2=5U	R=Reel
	Double Header/双头=D				G3=10 U"	G3=10	A=Box
	Bending/折弯= E				G4=15 U"	G4=15	
	Other/其他= F				G5=20 U"	G5=20	
	Lathe/车削件= G				G6=25 U"	G6=25	
					G7=30 U"	G7=30	

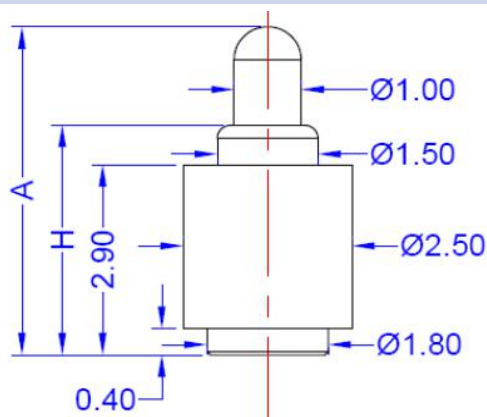

材质(Material)

针轴 (Plunger) : Brass 3604

针管 (Barrel) : Brass 3604

弹簧 (Spring) : SUS 304

环境性能(Environment Performance)

工作温度范围(Operating Temp): -40°C ~ +105°C


焊锡耐热性(Resistance to Solder heat) :260°C±5°
20s±2s

盐雾测试(Salt spray) :48H

额定电压 (Votage) : 3-36V

额定电流 (Current) : 1-3A

PIN :1P T 12P

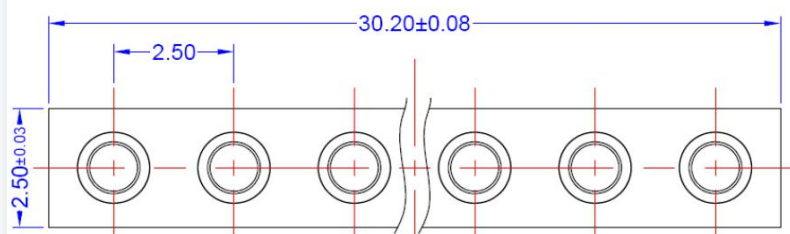

Series	P/N	Length A(mm)	H(mm)	Stroke (mm)	Full Stroke (mm)	Force (qF)	Resistance (mΩ)
13	HC-PGC-A2.5-065-XX-13-XX-XX-X	6.5	4.5	1.0	1.4	70±20	30
14	HC-PGC-A2.5-070-XX-14-XX-XX-X	7.0	4.5	1.0	1.4	70±20	30
15	HC-PGC-A2.5-065-XX-11-XX-XX-X	6.5	5.5	1.0	1.4	70±20	30
16	HC-PGC-A2.5-070-XX-12-XX-XX-X	7.0	5.5	1.0	1.4	70±20	30
17	HC-PGC-A2.5-075-XX-13-XX-XX-X	7.5	5.5	1.0	1.4	70±20	30
18	HC-PGC-A2.5-080-XX-14-XX-XX-X	8.0	5.5	1.0	1.4	70±20	30
19	HC-PGC-A2.5-085-XX-15-XX-XX-X	8.5	5.5	1.0	1.4	70±20	30
20	HC-PGC-A2.5-090-XX-11-XX-XX-X	9.0	7.5	1.0	1.4	70±20	30
21	HC-PGC-A2.5-095-XX-12-XX-XX-X	9.5	7.5	1.0	1.4	70±20	30
22	HC-PGC-A2.5-100-XX-13-XX-XX-X	10.0	7.5	1.0	1.4	70±20	30
23	HC-PGC-A2.5-105-XX-14-XX-XX-X	10.5	7.5	1.0	1.4	70±20	30
24	HC-PGC-A2.5-110-XX-15-XX-XX-X	11.0	7.5	1.0	1.4	70±20	30
25	HC-PGC-A2.5-120-XX-11-XX-XX-X	12.0	10.5	1.0	1.4	70±20	30
26	HC-PGC-A2.5-130-XX-12-XX-XX-X	13.0	10.5	1.0	1.4	70±20	30
27	HC-PGC-A2.5-140-XX-13-XX-XX-X	14.0	10.5	1.0	1.4	70±20	30
28	HC-PGC-A2.5-150-XX-13-XX-XX-X	15.0	12.5	1.0	1.4	70±20	30