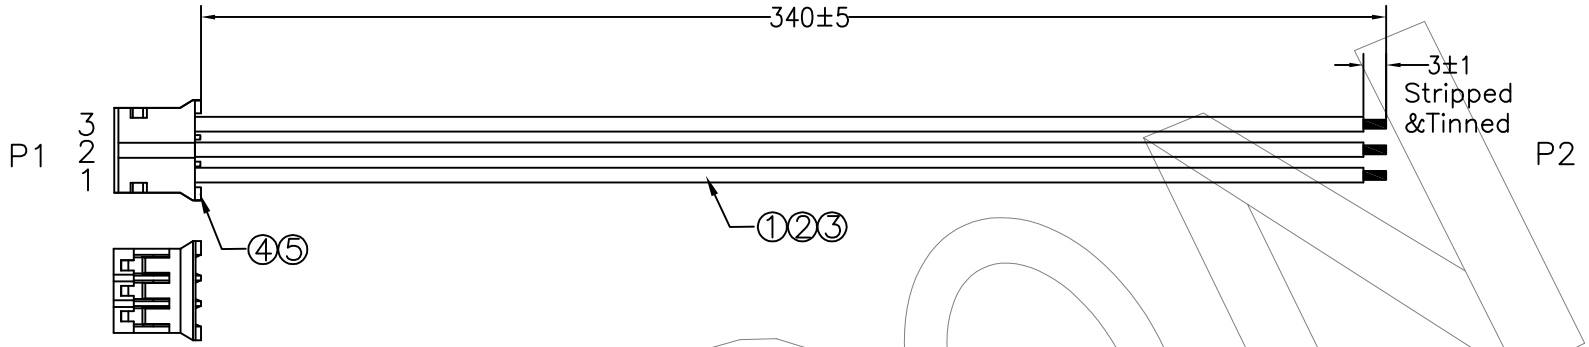


WIRING DIAGRAM

P1		P2
1	Green	Stripped&Tinned
2	Yellow	Stripped&Tinned
3	White	Stripped&Tinned

REMARKS:
1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

NO.	MATERIAL&SPECIFICATION	Q'ty
5	PH2.0-3P Housing,White	1PCS
4	PH2.0 terminal,Plating Tin	3PCS
3	UL1007 26AWG White	1PCS
2	UL1007 26AWG Yellow	1PCS
1	UL1007 26AWG Green	1PCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.08.25	NEW DRAWING	

OPERATION		DRAW	BoFeng	2022.08.25
X.X	±0.30			
X.XX	±0.20	CHECK	Jack L	2022.08.25
X.XXX	±0.10			
		APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.	HC-WH2003SNW340-03
TITLE:	PH2.0-3P TO Stripped Tin L=340MM