


Ordering Information

HC-PGP	Type	Length A	DIA	SR	Plating		Packing
					Plunger	Barrel	
P=PIN	SMT= A	XXX	XXX	XXX	针轴膜厚	针管膜厚	1= Bag
	Dip= B				G1=3U"	G1=3U"	T=Tube
	Solder =C				G2=5U"	G2=5U"	R=Reel
	Double Header=D				G3=10 U"	G3=10 U	A=Box
	Bending= E				G4=15 U"	G4=15 U	
	Other= F				G5=20 U"	G5=20 U	
	Lathe= G				G6=25 U"	G6=25 U	
					G7=30 U"	G7=30 U	

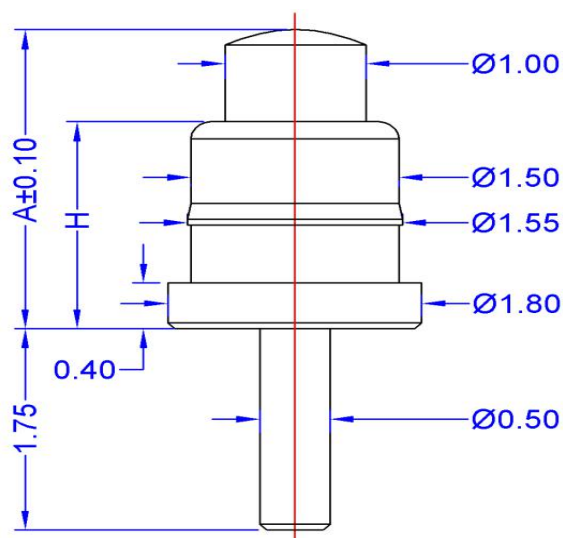

材质(Material)

针轴 (Plunger) : Brass 3604

针管 (Barrel) : Brass 3604

弹簧 (Spring) : SUS 304

环境性能(Environment Performance)

工作温度范围(Operating Temp): -40°C~ +105°C

焊锡耐热性(Resistance to Solder heat) :260°C±5° 20s±2s

盐雾测试(Salt spray) :48H

额定电压 (Votage) : 3-36V



Series	P/N	Length A(mm)	H (mm)	Stroke (mm)	Full Stroke (mm)	Force (gF)	Resistance (mΩ)	Current (A)	Votage (V)
1	HC-PGP-B-026-1.8-1-XX-XX-X	2.6	1.8	0.6	0.7	100±20	50	1	3-36
2	HC-PGP-B-028-1.8-2-XX-XX-X	2.8	1.8	0.6	0.7	100±20	50	1	3-36
3	HC-PGP-B-030-1.8-1-XX-XX-X	3.0	1.8	0.8	0.9	100±20	50	1	3-36
4	HC-PGP-B-032-1.8-1-XX-XX-X	3.2	2.4	0.8	0.9	100±20	50	1	3-36
5	HC-PGP-B-034-1.8-2-XX-XX-X	3.4	2.4	0.8	0.9	100±20	50	1	3-36
6	HC-PGP-B-036-1.8-1-XX-XX-X	3.6	2.7	0.8	1.0	100±20	50	1	3-36
7	HC-PGP-B-038-1.8-2-XX-XX-X	3.8	2.7	0.8	1.0	100±20	50	1	3-36
8	HC-PGP-B-041-1.8-3-XX-XX-X	4.1	2.7	0.8	1.0	100±20	50	1	3-36
9	HC-PGP-B-043-1.8-1-XX-XX-X	4.3	3.1	1.0	1.2	120±20	50	1	3-36
10	HC-PGP-B-045-1.8-2-XX-XX-X	4.5	3.1	1.0	1.2	120±20	50	1	3-36
11	HC-PGP-B-050-1.8-3-XX-XX-X	5.0	3.5	1.0	1.4	90±20	50	1	3-36
12	HC-PGP-B-055-1.8-1-XX-XX-X	5.5	4.5	1.0	1.4	70±20	30	3	3-36
13	HC-PGP-B-060-1.8-2-XX-XX-X	6.0	4.5	1.0	1.4	70±20	30	3	3-36
14	HC-PGP-B-065-1.8-3-XX-XX-X	6.5	4.5	1.0	1.4	70±20	30	3	3-36
15	HC-PGP-B-070-1.8-4-XX-XX-X	7.0	4.5	1.0	1.4	70±20	30	3	3-36
16	HC-PGP-B-065-1.8-1-XX-XX-X	6.5	5.5	1.0	1.4	70±20	30	3	3-36