


Ordering Information

HC-PGP	Type	Length A	DIA	SR	Plating		Packing
					Plunger	Barrel	
P=PIN	SMT= A	XXX	XXX	XXX	针轴膜厚	针管膜厚	1= Bag
	Dip= B				G1=3U"	G1=3U"	T=Tube
	Solder =C				G2=5U"	G2=5U"	R=Reel
	Double Header=D				G3=10 U"	G3=10 U	A=Box
	Bending= E				G4=15 U"	G4=15 U	
	Other= F				G5=20 U"	G5=20 U	
	Lathe= G				G6=25 U"	G6=25 U	
					G7=30 U"	G7=30 U	

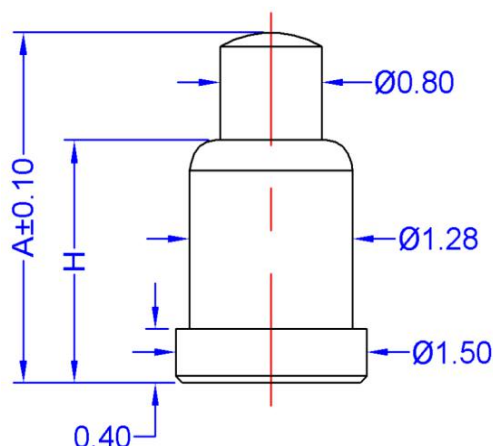

材质(Material)

针轴 (Plunger) : Brass 3604

针管 (Barrel) : Brass 3604

弹簧 (Spring) : SUS 304

环境性能(Environment Performance)

工作温度范围(Operating Temp): -40°C~ +105°C

焊锡耐热性(Resistance to Solder heat) :260°C±5° 20s±2s

盐雾测试(Salt spray) :48H

额定电压 (Voltage): 3-36V



Series	P/N	Length A(mm)	H (mm)	Stroke (mm)	Full Stroke (mm)	Force (gF)	Resistance (mΩ)	Current (A)	Voltage (V)
1	HC-PGP-A-026-1.5-21-XX-XX-X	2.6	1.8	0.6	0.7	70±20	50mΩ	1	5-36
2	HC-PGP-A-028-1.5-22-XX-XX-X	2.8	1.8	0.6	0.7	70±20	50mΩ	1	5-36

例如: 料号HC-PGP-A-026-1.5-1-G1-G2-T

HC-PGP=标准弹簧针, A=SMT式, 026=A2.6mm长度, DIA=1.5,21=单针SR代码, XX=针轴电镀膜厚代码, XX=针管电镀膜厚代码, T=管装

Eg: Part Nummber #HC-PGP-A-026-1.5-1-G1-G2-T

HC-PGP =HECON Spring Pogo Pin, A=SMT, 026=2.6mmLenght, DIA=1.5, 21=SR PIN Code, G1=3U Gold Plated For Plunger , G2=5U Gold Plated for Barrel, T=Tube Packing