
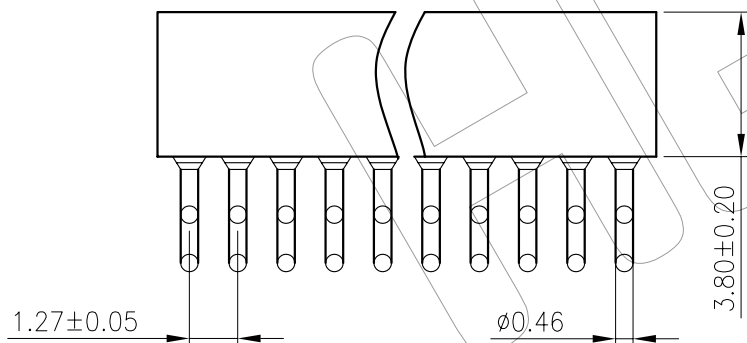


RoHS


Technical Specs:

Insulator: Black glass filled polyester PPS
Flammability: UL 94V-0
Sleeve: Brass (H59-3)
Contact clip(3 finger): Beryllium copper(C17300)
Accepted pin: $\varnothing 0.38$ to 0.50mm
Forces: (polished steel gauge $\varnothing 0.41\text{mm}$)
--Insertion 0.5 N typ
--Withdrawal 0.2 N typ
Mechanical life: min500 cycles
Rated current: 1A
Contact resistance: max $20\text{m}\Omega$
Dielectric resistance:Min 500V RMS

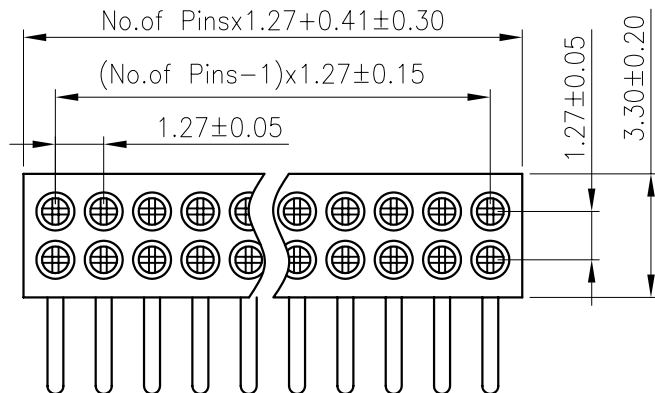

3.60 ± 0.25

5.00 ± 0.25



Ordering Information

HC-MF724 38 2 XX R XX 089 01

Insulator Type
Code
1: Single row
2: Double row

No. of Pins
1x40Pins
2x40Pins

Contact Plating
SN: Tin
G0: Gold Flash
G2: 2U" Gold
G3: 3U" Gold
G4: 5U" Gold
G5: 10U" Gold
S0: Gold Flash/Tin
Standard: G0

Pin Length
089=8.9mm

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^\circ$

DIM TOL

DRAW

Ayang

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MF724382XXRXX08901

TITLE:

1.27x3.8mm Machine Female Header Right
Angle L=8.9/11.4