


Ordering Information

HC-PGP	Type	Length A	DIA	SR	Plating		
					Plunger	Barrel	Packing
P=PIN	SMT= A	XXX	XXX	XXX	针轴膜厚	针管膜厚	1= Bag
	Dip= B				G1=3U"	G1=3U"	T=Tube
	Solder =C				G2=5U"	G2=5U"	R=Reel
	Double Header=D				G3=10 U"	G3=10 U	A=Box
	Bending= E				G4=15 U"	G4=15 U	
	Other= F				G5=20 U"	G5=20 U	
	Lathe= G				G6=25 U"	G6=25 U	
					G7=30 U"	G7=30 U	

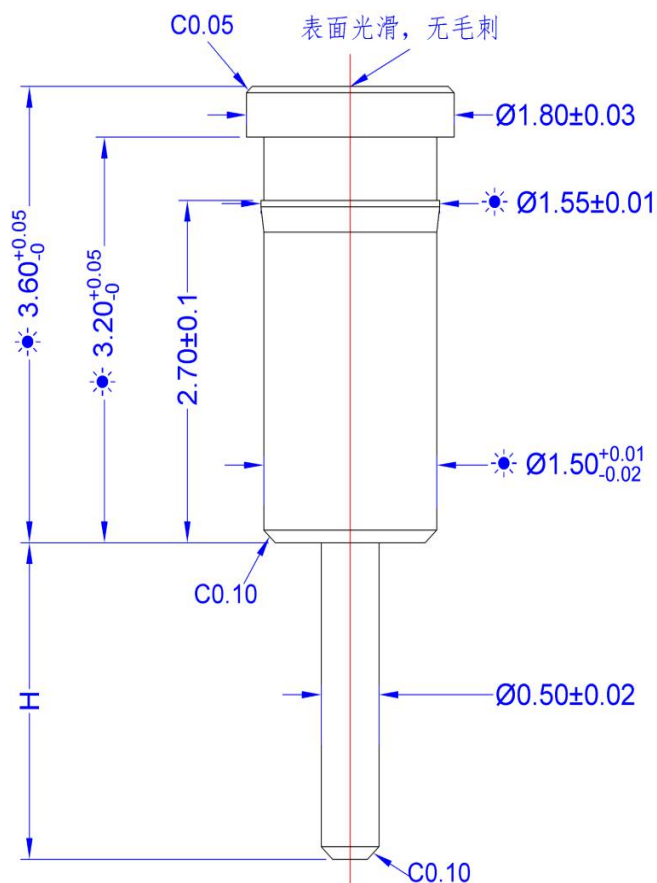

材质(Material)

针轴 (Plunger) : Brass 3604

针管 (Barrel) : Brass 3604

弹簧 (Spring) : SUS 304

环境性能(Environment Performance)

工作温度范围(Operating Temp): $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ 焊锡耐热性(Resistance to Solder heat) : $260^{\circ}\text{C} \pm 5^{\circ}$
 $20\text{s} \pm 2\text{s}$

盐雾测试(Salt spray) : 48H

额定电压 (Votage) : 3-36V



Series	P/N	Length A(mm)	H (mm)	Stroke (mm)	Full Stroke (mm)	Force (gF)	Resistance (mΩ)	Current (A)	Votage (V)
1	HC-PGP-G-036-1.8-XXX	3.6	0				10	3	3-36
2	HC-PGP-G-061-1.8-XXX	6.1	2.5				10	3	3-36
3	HC-PGP-G-096-1.8-XXX	9.6	6.0				10	3	3-36
4	HC-PGP-G-147-1.8-XXX	14.7	11.1				10	3	3-36