

RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c





Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

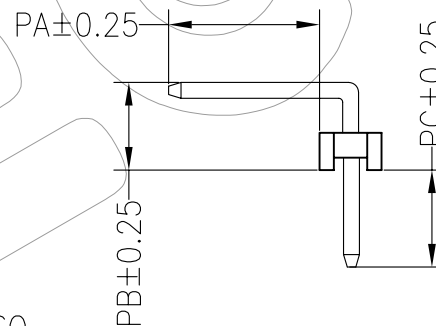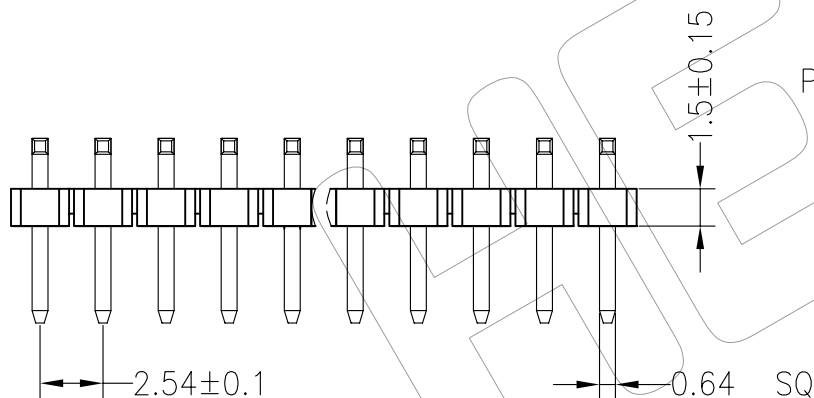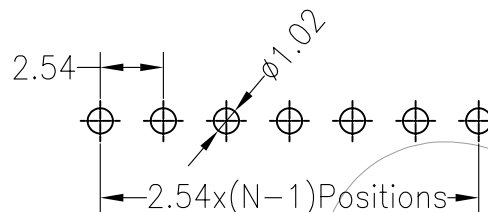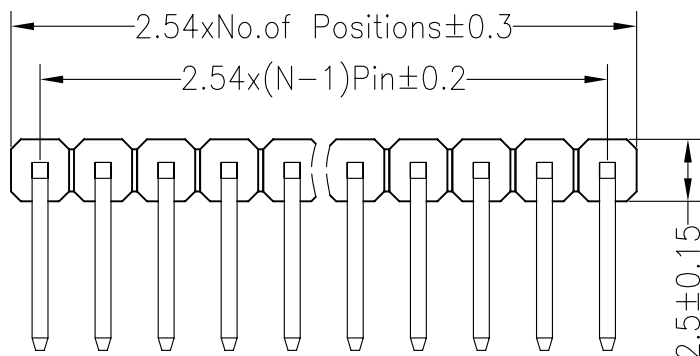

Ordering Information

HC-PH415 11XX X N XX R XXX X 02

No.of
Pins
Per Row
1x40
1---40

Insulator Material
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP

Contact Plating
G0:Gold Flash
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
0=PE Bag
T=Tube

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	4.40	3.00	13.8
Alternate				

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^{\circ}$

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ ∇

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PH41511XXXNXXRXXX02

TITLE:

2.54mm H1.5 Single Row Right Angle
Pin Header

				OPERATION		DRAW	Ayang		SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. HC-PH41511XXXNXXRXXX02	
				X.XXX	±0.10				SHEET	1/1		
A0		NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE: 2.54mm H1.5 Single Row Right Angle Pin Header	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							