




RoHS

Technical Specs:

Insulator: Glass-epoxy laminate FR-4
Flammability: UL 94V-O
Sleeve: Brass CuZn36Pb3(C36000)
Contact clip(6 finger): Beryllium copper(C17200)
Accepted pin: Ø0.31 to 0.48mm
Forces: (polished steel gauge Ø0.381mm)
--Insertion 0.6N typ
--Withdrawal 0.15N typ
Mechanical life: min500 cycles
Rated current: 1A
Contact resistance: max 20mΩ
Dielectric resistance:Min 500V RMS

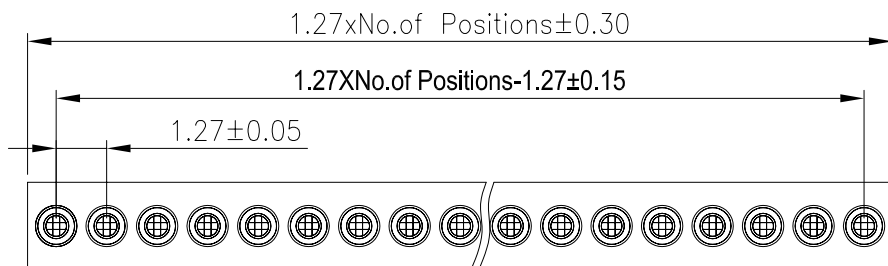

Ø0.31~Ø0.48

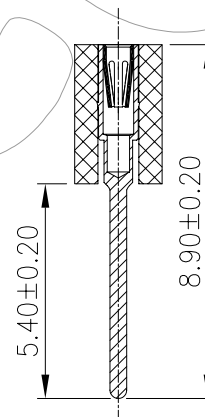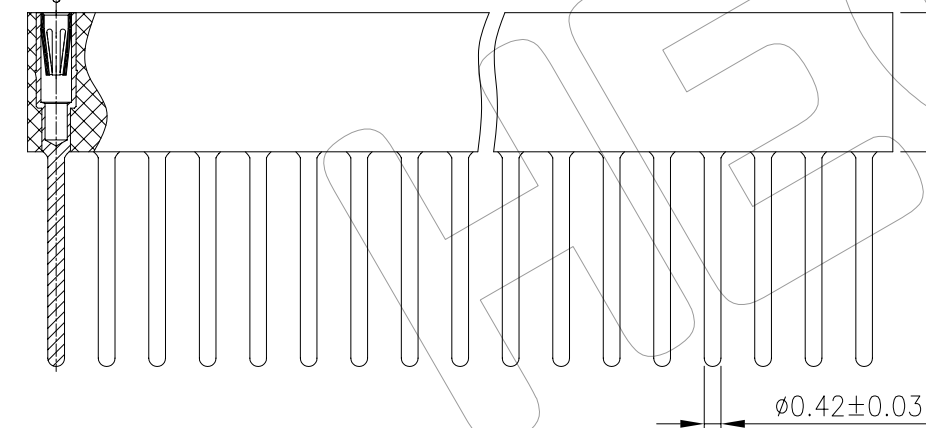

Ordering Information

HC-MF724 35 1 XX S XX 089 01

Insulator Type
Code
1: Single row
2: Double row

No. of
Pins
1x40Pins
2x40Pins

Contact Plating
SN: Tin
G0: Gold Flash
G2: 2U"Gold
G3: 3U"Gold
G4: 5U"Gold
G5: 10U"Gold
S0: Gold Flash/Tin
Standard: G0

Pin
Length
089=8.9mm

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MF724351XXSXX08901

TITLE:

1.27x3.5mm Machine Female Header Straight
L=8.9

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9