


RoHS

Materials

Pin (outer sleeve) :Brass,
Clip(contact 4 /6finger) :Beryllium copper,heat treated
Plating(outer sleeve) :
Tin plated : 1.25u"m/50u"nickel,5um/200u"Tin
Gold plated: 1.25u"m/50u"nickel,full gold
Plating clip(contact):
1.25um/50 u"nickel,gold or tin plating
Insulator body(black) : PPS
polyester UL94V-0 electrical
Current rating : 3 Amps/contact max.
Contact resistance : 10mΩ /contact
Insulation resistance : 1000M at V=100V
Operating voltage : 60 AC/DC

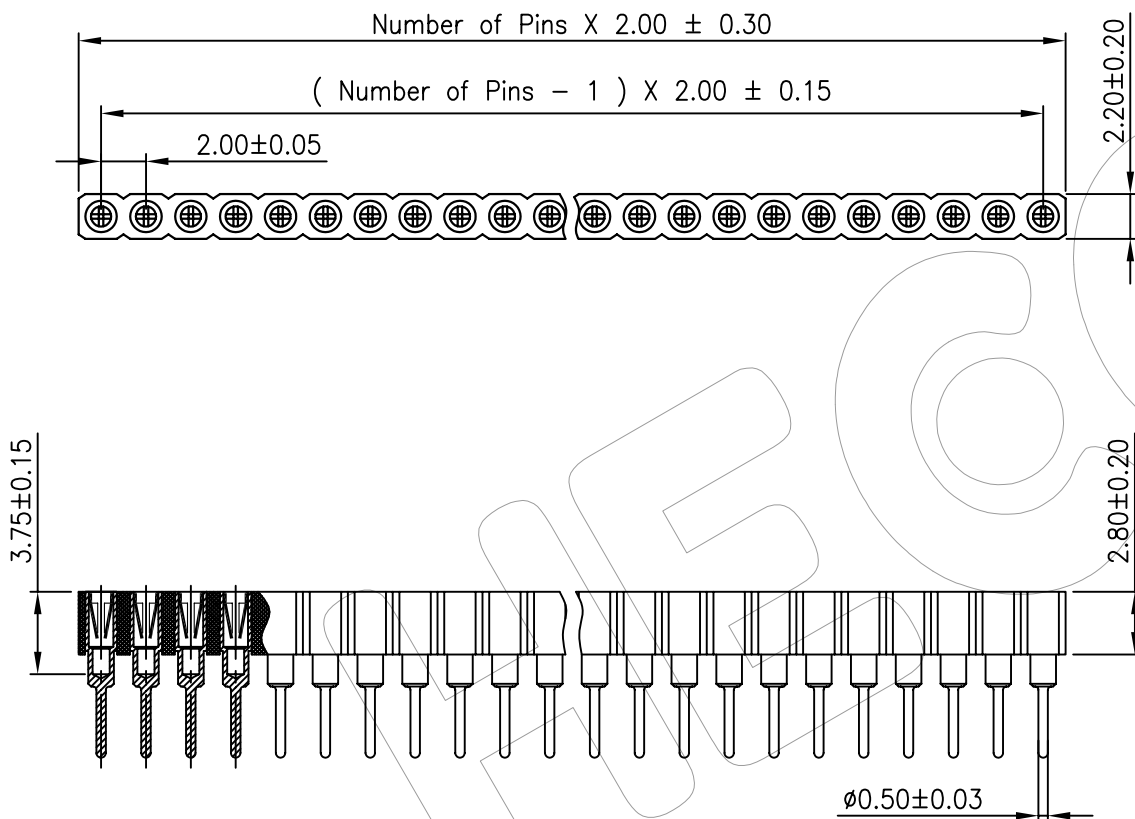

Ordering Information

HC-MF522 28 1 XX S XX 074 01

Insulator Type Code 1: Single row 2: Double row	No. of Pins 1x40Pins 2x40Pins	Contact Plating SN: Tin G0: Gold Flash G2: 2U"Gold G3: 3U"Gold G4: 5U"Gold G5: 10U"Gold S0: Gold Flash/Tin Standard: G0	Pin Length 074=7.40mm
--	--	---	-----------------------------

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MF522281XXSXX07401

TITLE:

2.00x2.8mm Machine Female Header Straight
L=7.4