

**RoHS**

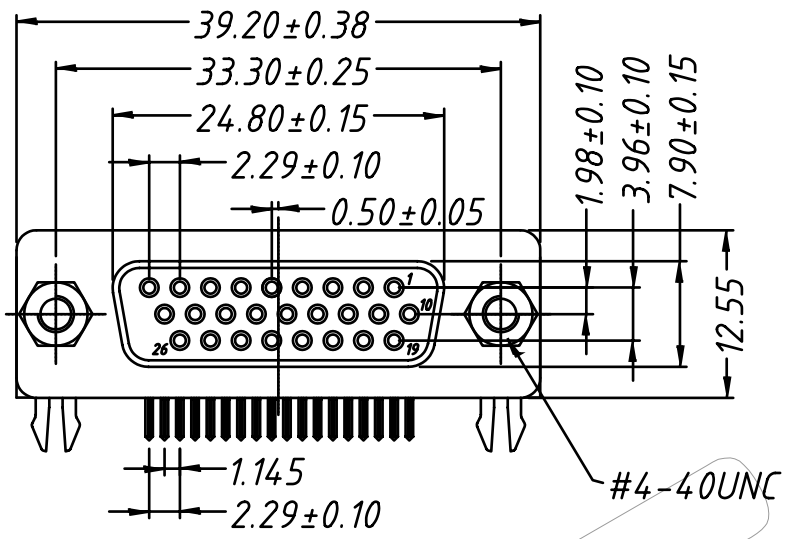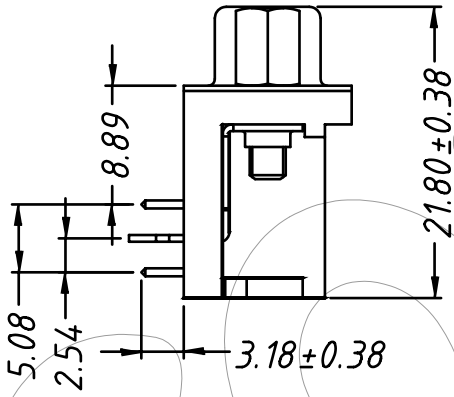



**01 Type**


**MATERIAL&FINISH**

***Shell***: SPCC Material,Nickel Plating
***Insulator***: P.B.T+30% Glass Fiber(UL94V-0)
***Contact Finish***: Gold Flash On Contact Area,
Tin Plated On Solder Tail ,under Plated Nickel
***Contact Material***: Brass
***Boardlocks :*** SPCC Material, Tin Plating
***Screw:*** 12L14 Material , Nickel Plating

**ELECTRICAL CHARACTERISTICS**

***Cur Rating***: 5amps
***Withstanding Voltance***: 1000v(one Minute)
***Contact Resistance:*** 20mΩ max
***Insulation Resistance***: 1000mΩ Min.at 500V DC
***Operating Temperature***: -50° C ~ +105° C

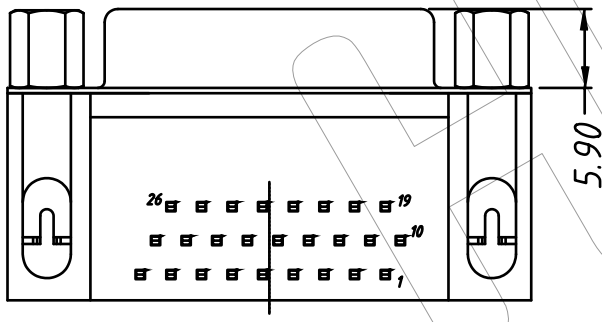

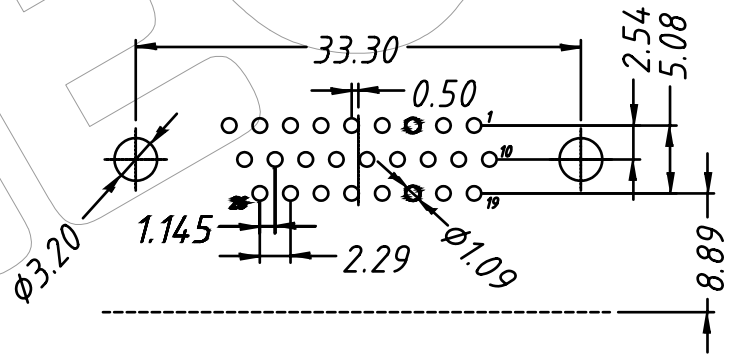
RECOMMEMDED P.C.B LAYOUT

Ordering Information

HC-6236-7 26 F R S0 B 01

- 26 — No.of Pins 26P
- F — Connector Type: F=Female, M=Male
- R
- S0 — Contact Plating: S0:Gold Flash/Tin, G0:Gold Flash
- B — Color: B=Black, W=Whtie
- 01

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | | NEW DRAWING | |

| OPERATION | | DRAW | Ayang | SCALE | FIT |
|---|---|---|---|---|---|
| X.X | ±0.30 | | | UNIT | mm |
| X.XX | ±0.20 | CHECK | | SIZE | A4 |
| X.XXX | ±0.10 | | | SHEET | 1/1 |
| Angle | ±3° | APPROVE | | PROJ. | |
| DIM | TOL | | | | |

**HECON** 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

| | |
|---|---|
| PART NO. | HC-6236-726FRS0B01 |
| TITLE: | HD D-SUB Connector Right Angle 26P Female |