

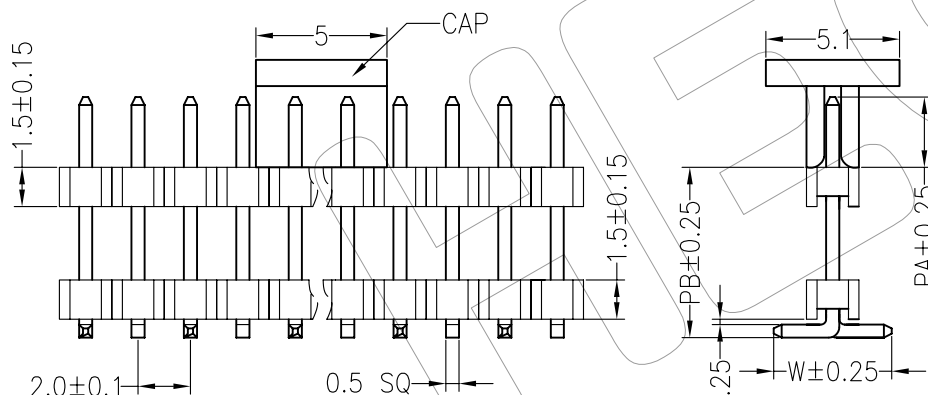
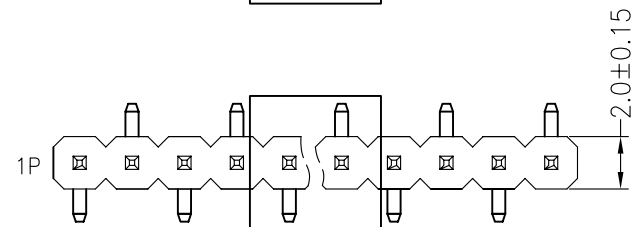
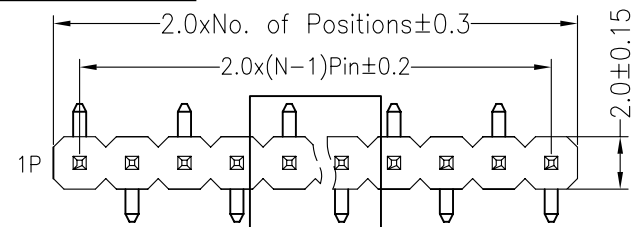


RoHS

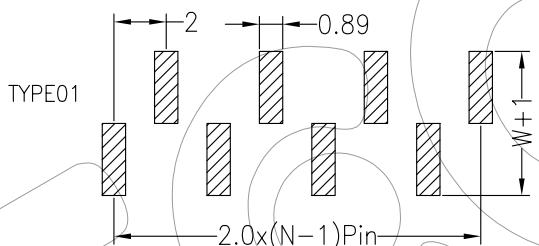

Dimension antitheses list					
ITEM	PA	PB	D	W	L
Standard	4.00	3.60	0.10	4.50	9.40
Alternate					

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

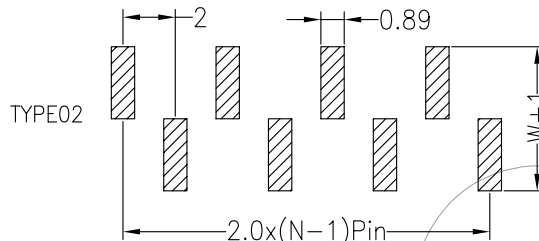

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Ordering Information

HC-PH515 2 1 XX X N XX M XXX X 01(2)

No. of Pins Per Row 1*1~1*40	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP	Post W=With Post N=W/O Post	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Pin Length	Packing 0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap
------------------------------------	---	-----------------------------------	---	------------	---

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

Ayang

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-PH51521XXXNXXMXXX01(2)

TITLE:

2.0mm H1.5x2 Single Row SMT Pin Header

1.5±0.15

2.0±0.1

0.5 SQ

D±0.25

W±0.25

PA±0.25