




RoHS

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: 20m Ω max

HOUSING

- Part No. : HC-H2503-NP
- Poles : 02-15P
- Housing Material: Nylon66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

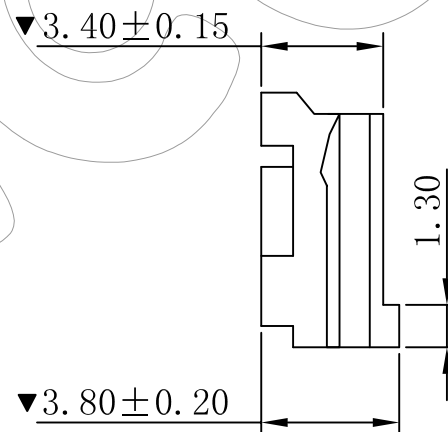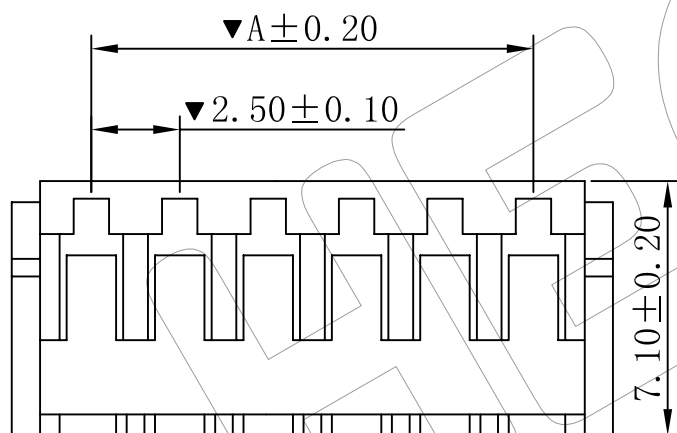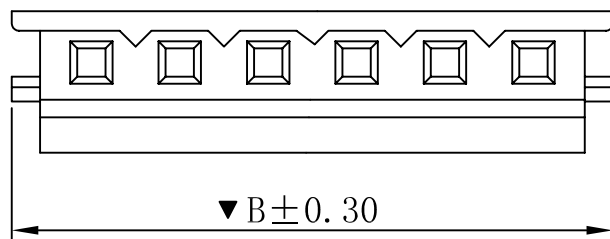

Part No	Dimensions (mm)	
	A	B
02	2.50	7.00
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50

OPERATION

X.X $\pm$ 0.30

X.XX $\pm$ 0.20

X.XXX $\pm$ 0.10

Angle $\pm$ 3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-H2503-NP

TITLE:

EH2.50mm Housing
Connector Series